

F31RE084MOOP840DG

- FIL35 REC 840 2220 NW OPAL DALI GR.

**Description:**

**Finish:** Gloss grey

**Installation:** Recessed

**TECHNICAL SPECIFICATIONS:**

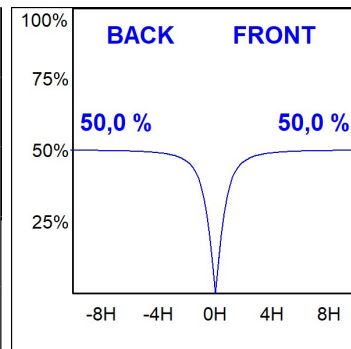

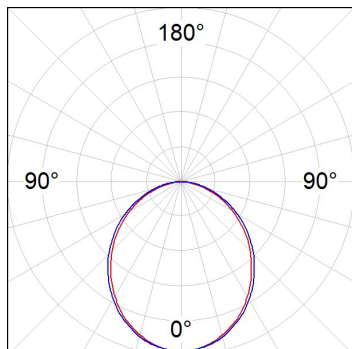

<b>Light output:</b>	1.329 lm	<b>°K :</b>	4000
<b>Plum:</b>	13,5W	<b>CRI :</b>	80
<b>Efficacy:</b>	98,4 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	70.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	12W		

*Light output tolerance +/- 10%*



PHOTOMETRIC DATA :

F31RE084MOOP840DG  
 $\eta = 100\%$   
 $I_{max} = 389 \text{ cd/klm}$   
UTE: 1,00E  
CIE: 49 80 97 100 100



ACCESORIES :

Assembly



**Product code:**

F3COX/MMB

**Description:**

FIL 35 ACC. COVER X/MM BK.



**Product code:**

F3COX/MMG

**Description:**

FIL 35 ACC. COVER X/MM GR.



**Product code:**

F3COX/MMW

**Description:**

FIL 35 ACC. COVER X/MM WH.