

F31RE112MOOC840DG

- FIL35 REC 1120 2960 NW OP COMF DALI GR.

Description:

Finish: Gloss grey

Installation: Recessed

TECHNICAL SPECIFICATIONS:

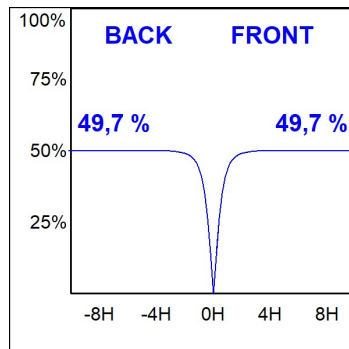
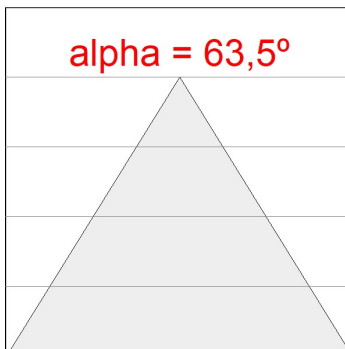
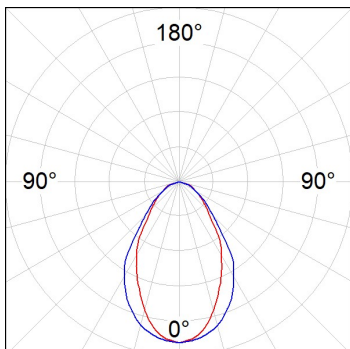

Light output:	1.630 lm	°K :	4000
Plum:	18W	CRI :	80
Efficacy:	90,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	16W		

Light output tolerance +/- 10%



PHOTOMETRIC DATA :

F31RE112MOOC840DG
 $\eta = 99\%$
 $I_{max} = 693 \text{ cd/klm}$
UTE: 0,99C
CIE: 70 93 100 100 99



ACCESORIES :

Assembly



Product code:

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.



Product code:

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.



Product code:

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.