

F31RE112MOOC840DW

- FIL35 REC 1120 2960 NW OP COMF DALI WH.

---

**Description:**

**Finish:** Matte white RAL 9010

---

**Installation:** Recessed

---

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.630 lm	<b>°K :</b>	4000
<b>Plum:</b>	18W	<b>CRI :</b>	80
<b>Efficacy:</b>	90,6 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	MID POWER LED	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	70.000 L80 B10 (Ta=25°C)		
<b>Power:</b>	16W		





*Light output tolerance +/- 10%*

---



PHOTOMETRIC DATA :

F31RE112MOOC840DW  
 $\eta = 99\%$   
 $I_{max} = 693 \text{ cd/klm}$   
UTE: 0,99C  
CIE: 70 93 100 100 99

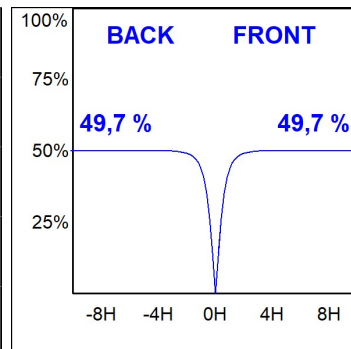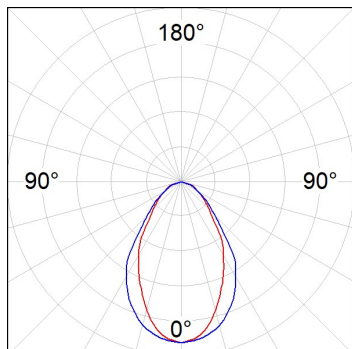

ACCESORIES :

Assembly




**Product code:**

F3COX/MMB

**Description:**

FIL 35 ACC. COVER X/MM BK.




**Product code:**

F3COX/MMG

**Description:**

FIL 35 ACC. COVER X/MM GR.



**Product code:**

F3COX/MMW

**Description:**

FIL 35 ACC. COVER X/MM WH.