

F31RE140MOOC830DB

- FIL35 REC 1400 3700 WW OP COMF DALI BK.

**Description:**

**Finish:** Matte black RAL 9011

**Installation:** Recessed

**TECHNICAL SPECIFICATIONS:**

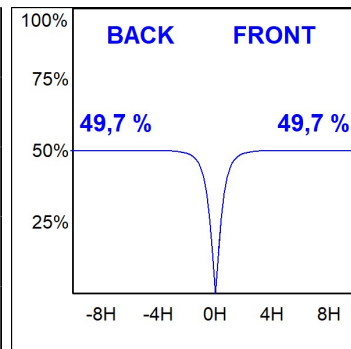
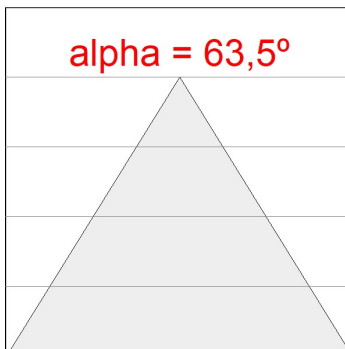
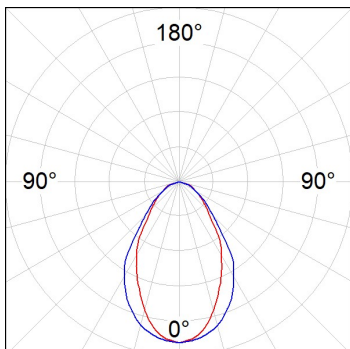

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.964 lm                 | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 21,2W                    | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 92,7 lm/w                | <b>MacAdam:</b>      | 3                |
| <b>UGR:</b>          | <19                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Type:</b>         | MID POWER LED            | <b>Gear:</b>         | Adjustable DALI  |
| <b>LED Lifetime:</b> | 70.000 L80 B10 (Ta=25°C) |                      |                  |
| <b>Power:</b>        | 19W                      |                      |                  |

*Light output tolerance +/- 10%*



PHOTOMETRIC DATA :

F31RE140MOOC830DB  
 $\eta = 99\%$   
 $I_{max} = 693 \text{ cd/klm}$   
UTE: 0,99C  
CIE: 70 93 100 100 99



ACCESORIES :

Assembly



**Product code:**

F3COX/MMB

**Description:**

FIL 35 ACC. COVER X/MM BK.



**Product code:**

F3COX/MMG

**Description:**

FIL 35 ACC. COVER X/MM GR.



**Product code:**

F3COX/MMW

**Description:**

FIL 35 ACC. COVER X/MM WH.