FIL35

F31RE140MOOC840DB



Finish: Matte black RAL 9011

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.038 lm	⁰K :	4000
Plum:	21,2W	CRI :	80
Efficacy:	96,1 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Туре:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25⁰C)		
Power:	19W		

Light output tolerance +/- 10%

EPD




Product datasheet

FIL35

F31RE140MOOC840DB

FIL35 REC 1400 3700 NW OP COMF DALI BK.



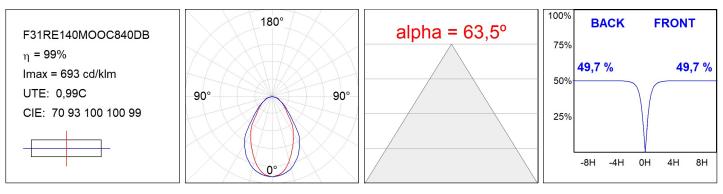

Worktitude for light

Product datasheet

FIL35

ACCESORIES :

Assembly



Product code: F3COX/MMB

Description: FIL 35 ACC. COVER X/MM BK.



Product code: F3COX/MMG

Description: FIL 35 ACC. COVER X/MM GR. Worktitude for light



Product code: F3COX/MMW Description: FIL 35 ACC. COVER X/MM WH.