

F31RE168MOOC830DW

- FIL35 REC 1680 4440 WW OP COMF DALI WH.

Description:

Finish: Matte white RAL 9010

Installation: Recessed


TECHNICAL SPECIFICATIONS:

Light output:	2.357 lm	°K :	3000
Plum:	25,2W	CRI :	80
Efficacy:	93,5 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	22W		

Light output tolerance +/- 10%



PHOTOMETRIC DATA :

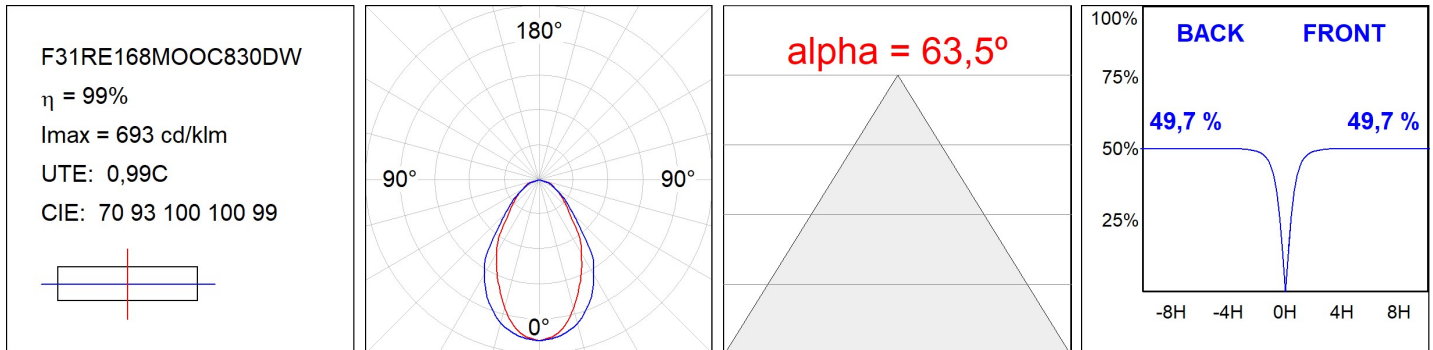

ACCESORIES :

Assembly



Product code:

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.



Product code:

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.



Product code:

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.