

F31RE168MOOP840DW

- FIL35 REC 1680 4440 NW OPAL DALI WH.

Description:

Finish: Matte white RAL 9010

Installation: Recessed

TECHNICAL SPECIFICATIONS:




Light output:	2.658 lm	°K :	4000
Plum:	25,2W	CRI :	80
Efficacy:	105,5 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	70.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	22W		

Light output tolerance +/- 10%



PHOTOMETRIC DATA :

F31RE168MOOP840DW
 $\eta = 100\%$
 $I_{max} = 389 \text{ cd/klm}$
UTE: 1,00E
CIE: 49 80 97 100 100

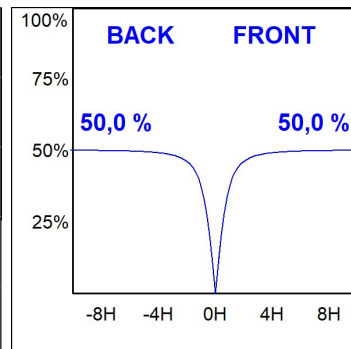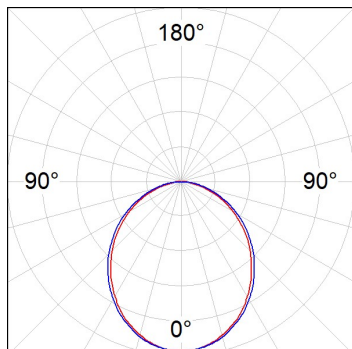

ACCESORIES :

Assembly



Product code:

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.




Product code:

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.



Product code:

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.