

F31SF084MOOP830DW

- FIL35 SUR 840 2220 WW OPAL DALI WH.

Description:


Finish: Matte white RAL 9010

Installation: Surface

TECHNICAL SPECIFICATIONS:




Light output:	1.281 lm	°K :	3000
Plum:	13,5W	CRI :	80
Efficacy:	94,9 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	70.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	12W		

Light output tolerance +/- 10%



PHOTOMETRIC DATA :

F31SF084MOOP830DW
 $\eta = 100\%$
 $I_{max} = 389 \text{ cd/klm}$
UTE: 1,00E
CIE: 49 80 97 100 100

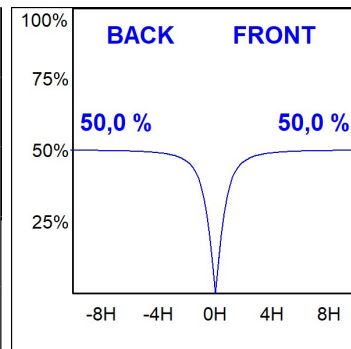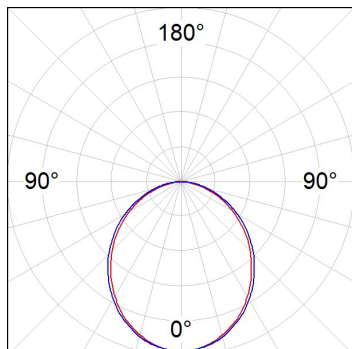

ACCESORIES :

Assembly



Product code:

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.




Product code:

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.



Product code:

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.



Product code:

F3FX50B

Description:

ACC. WALL BRACKET FIL45 50MM BK.



Product code:

F3FX50G

Description:

ACC. WALL BRACKET FIL35 50MM GR.



Product code:

F3FX50W

Description:

ACC. WALL BRACKET FIL35 50MM WH.

ACCESORIES :

Support



Product code:

F3FX15G

Description:

ACC. CEILING BRACKET FIL35 15MM GR.