

F31SF112MOOC830DG

- FIL35 SUR 1120 2960 WW OP COMF DALI GR.

Description:


Finish: Gloss grey

Installation: Surface

TECHNICAL SPECIFICATIONS:

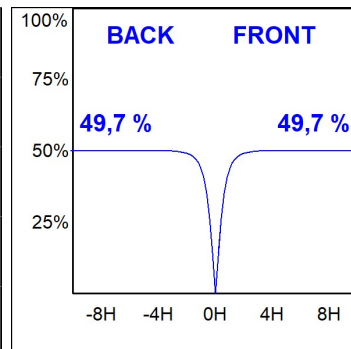

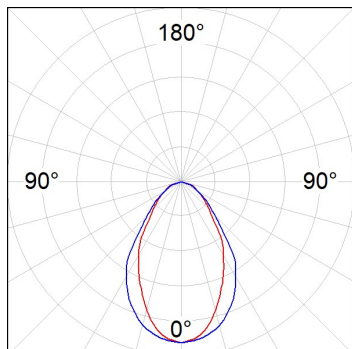

Light output:	1.571 lm	°K :	3000
Plum:	18W	CRI :	80
Efficacy:	87,3 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	16W		

Light output tolerance +/- 10%



PHOTOMETRIC DATA :

F31SF112MOOC830DG
 $\eta = 99\%$
 $I_{max} = 693 \text{ cd/klm}$
UTE: 0,99C
CIE: 70 93 100 100 99



ACCESORIES :

Assembly



Product code:
F3COX/MMB

Description:
FIL 35 ACC. COVER X/MM BK.



Product code:
F3COX/MMG

Description:
FIL 35 ACC. COVER X/MM GR.



Product code:
F3COX/MMW

Description:
FIL 35 ACC. COVER X/MM WH.



Product code:
F3FX50B

Description:
ACC. WALL BRACKET FIL45 50MM BK.



Product code:
F3FX50G

Description:
ACC. WALL BRACKET FIL35 50MM GR.



Product code:
F3FX50W

Description:
ACC. WALL BRACKET FIL35 50MM WH.

ACCESORIES :

Support



Product code:
F3FX15G

Description:
ACC. CEILING BRACKET FIL35 15MM GR.