


F31SF140MOOC830DG

- FIL35 SUR 1400 3700 WW OP COMF DALI GR.

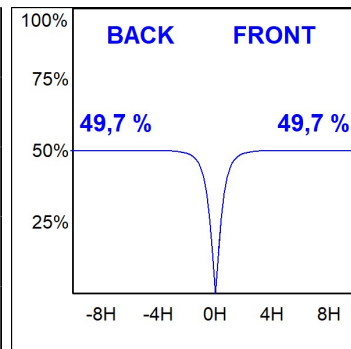
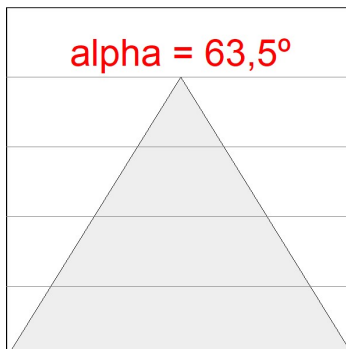
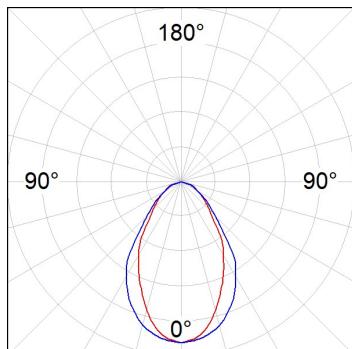

Description:**Finish:** Gloss grey**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.964 lm	°K :	3000
Plum:	21,2W	CRI :	80
Efficacy:	92,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	70.000 L80 B10 (Ta=25°C)		
Power:	19W		

Light output tolerance +/- 10%

PHOTOMETRIC DATA :

F31SF140MOOC830DG
 $\eta = 99\%$
 $I_{max} = 693 \text{ cd/klm}$
UTE: 0,99C
CIE: 70 93 100 100 99



ACCESORIES :

Assembly



Product code:

F3COX/MMB

Description:

FIL 35 ACC. COVER X/MM BK.



Product code:

F3COX/MMG

Description:

FIL 35 ACC. COVER X/MM GR.



Product code:

F3COX/MMW

Description:

FIL 35 ACC. COVER X/MM WH.



Product code:

F3FX50B

Description:

ACC. WALL BRACKET FIL45 50MM BK.



Product code:

F3FX50G

Description:

ACC. WALL BRACKET FIL35 50MM GR.



Product code:

F3FX50W

Description:

ACC. WALL BRACKET FIL35 50MM WH.

ACCESORIES :

Support



Product code:

F3FX15G

Description:

ACC. CEILING BRACKET FIL35 15MM GR.