


F41SF168MOPRWB4NG



FIL45 SUR 1680 3600 WBN OP COMF GR.

Description:

LAMP Suspended or mounted surface structure model FIL45 SUR 1680. Made in extruded recycled aluminum with a rate of 80%, with opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<16. Model for LED MID-POWER WELLBEING technology 4000K with CRI98 and with electronic wiring included. With IP43, sauf en cas d'installation suspendue, qui devient IP20, IK07 protection rating. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L70 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

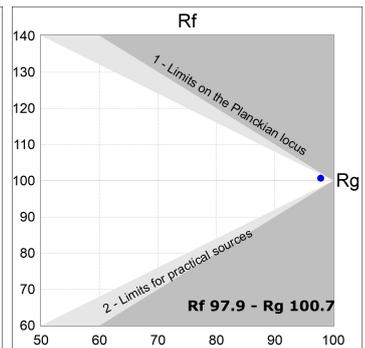



Finition: Gris satiné**Dimensions:** 1.680 x 55 x 80 mm**Poids:** 3.500 g**Installation:** Surface**SPÉCIFICATIONS TECHNIQUES:**

Flux lumineux:	2.593 lm	°K :	4000
Plum:	29W	IRC :	98
Efficacité:	89 lm/w	R9 :	99
UGR:	<16	MacAdam:	3
Type:	MID POWER	Alimentation:	220-240V 50/60Hz
Durée de vie LED:	60.000 L70 B10 (Ta=25°C)	Équipement:	Électronique
Puissance:	26,3W		

Tolérance de flux lumineux +/- 10%**OPTIONS PERSONNALISABLES:**

DONNÉES PHOTOMÉTRIQUES :

F41SF168MOPRWB4NG
 $\eta = 99\%$
 $I_{max} = 968 \text{ cd/klm}$
 UTE: 0,99A
 CIE: 90 100 100 100 99

ACCESSOIRES :

Montage



Code produit:

F42JO

Description:

FIL45 ACC. SU/RE INTM JOINT B



Code produit:

F4COX/MMB

Description:

FIL 45 ACC. COVER X/MM BK.



Code produit:

F4COX/MMG

Description:

FIL 45 ACC. COVER X/MM GR.



Code produit:

F4COX/MMW

Description:

FIL 45 ACC. COVER X/MM WH.



Code produit:

F4FX50B

Description:

ACC. WALL BRACKET FIL45 50MM BK.



Code produit:

F4FX50G

Description:

ACC. WALL BRACKET FIL45 50MM GR.



Code produit:

F4FX50W

Description:

ACC. WALL BRACKET FIL45 50MM WH.



Code produit:

F4PRSUX/MMB

Description:

FIL 45 ACC. SUS PROFIL X/MM BK.



Code produit:

F4PRSUX/MMG

Description:

FIL 45 ACC. SUS PROFIL X/MM GR.



Code produit:

F4PRSUX/MMW

Description:

FIL 45 ACC. SUS PROFIL X/MM WH.



Code produit:
F4SUECB

Description:
FIL45 ACC. SUR END COVER BK.



Code produit:
F4SUECG

Description:
FIL45 ACC. SUR END COVER GR.



Code produit:
F4SUECW

Description:
FIL45 ACC. SUR END COVER WH.

ACCESSOIRES :

Suspension



Code produit:
F4SUCAEMFA1000NB
F4SUCAEMFA4000NB

Description:
ACC. ELECMEC FIL45 QUICK SUSP 1M BK.
ACC. ELECMEC FIL45 QUICK SUSP 4M BK.



Code produit:
F4SUCAEMFA1000NG
F4SUCAEMFA4000NG

Description:
ACC. ELECMEC FIL45 QUICK SUSP 1M GR.
ACC. ELECMEC FIL45 QUICK SUSP 4M GR.



Code produit:
F4SUCAEMFA1000NW
F4SUCAEMFA4000NW

Description:
ACC. ELECMEC FIL45 QUICK SUSP 1M WH.
ACC. ELECMEC FIL45 QUICK SUSP 4M WH.



Code produit:
F4SUCAWI1000DB
F4SUCAWI4000DB

Description:
ACC. ELECMEC FIL45 QUICK SUSP 1M 5P BK.
ACC. ELECMEC FIL45 QUICK SUSP 4M 5P BK.



Code produit:
F4SUCAWI1000DG
F4SUCAWI4000DG

Description:
ACC. ELECMEC FIL45 QUICK SUSP 1M 5P GR.
ACC. ELECMEC FIL45 QUICK SUSP 4M 5P GR.



Code produit:
F4SUCAWI1000DW
F4SUCAWI4000DW

Description:
ACC. ELECMEC FIL45 QUICK SUSP 1M 5P WH.
ACC. ELECMEC FIL45 QUICK SUSP 4M 5P WH.



Code produit:

F4SUWIDE1000G

Description:

FIL45 ACC. QUICK STEEL CABLE 1M NK.



Code produit:

F4SUWIDE4000G

Description:

FIL45 ACC. QUICK STEEL CABLE 4M NK.

ACCESSOIRES :

Support



Code produit:

F4FX15G

Description:

FIL45 ACC. CEILING BRACKET 15MM GR.

ACCESSOIRES :

Optique



Code produit:

F4DIX/MMOP

Description:

FIL 45 ACC. OPAL DIFFUSER X/MM

ACCESSOIRES :

Contrôle et réglage



Code produit:

F41EMG3HDWB

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK



Code produit:

F41EMG3HDWG

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR



Code produit:

F41EMG3HDWW

Description:

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH



Code produit:

F41LIGHTSNDB

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 BK



Code produit:

F41LIGHTSNDG

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 GR



Code produit:

F41LIGHTSNDW

Description:

ACC.FIL45 SENSOR BASIC ILD DALI-2 WH