

## F42RE196MOTE930DG




## - FIL45 G2 REC 1960 3920 9WW TECH DALI GR

**Description:**

LAMP recessed structure FIL45 G2 REC 1960. Manufactured from extruded aluminum with an 80% recycling rate, optic and black mat polycarbonate reflector TECH ULTRACONFORT to control light distribution and reduce glare UGR <15. Model for LED MID-POWER, colour temperature 3000K and IRC90. Electronic DALI gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 90.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finition:** Gris satiné**Dimensions:** 1.958 x 55 x 76 mm**Installation:** Encastré**Mesures encastrement:** 1,966 x 51 x 0 mm**SPÉCIFICATIONS TECHNIQUES:**

|                          |                          |                      |                  |
|--------------------------|--------------------------|----------------------|------------------|
| <b>Flux lumineux:</b>    | 3.056 lm                 | <b>°K :</b>          | 3000             |
| <b>Plum:</b>             | 26W                      | <b>IRC :</b>         | 90               |
| <b>Efficacité:</b>       | 117,5 lm/w               | <b>R9 :</b>          | 71               |
| <b>UGR:</b>              | <15                      | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>             | MID POWER                | <b>Alimentation:</b> | 220-240V 50/60Hz |
| <b>Durée de vie LED:</b> | 90.000 L80 B10 (Ta=25°C) | <b>Équipement:</b>   | Réglable DALI    |
| <b>Puissance:</b>        | 23W                      |                      |                  |

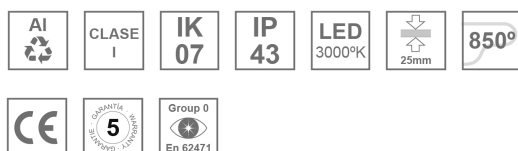**Tolérance de flux lumineux +/- 10%****OPTIONS PERSONNALISABLES:**

DONNÉES PHOTOMÉTRIQUES :

F42RE196MOTE930DG




$\eta = 100\%$

$I_{max} = 906 \text{ cd/klm}$

UTE: 1,00A

CIE: 92 100 100 100 100



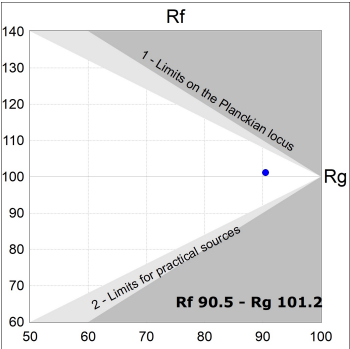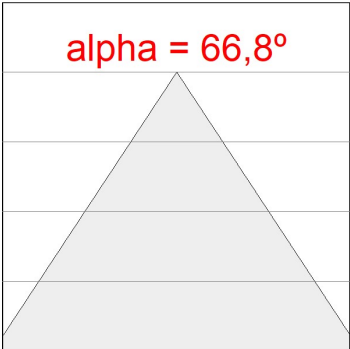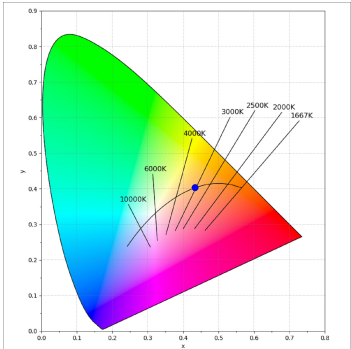

F42SF224MOTA930DW




$\eta = 100\%$

$I_{max} = 1070 \text{ cd/klm}$

UTE: 1,00A

CIE: 85 100 100 100 100



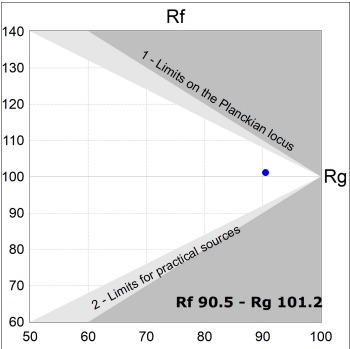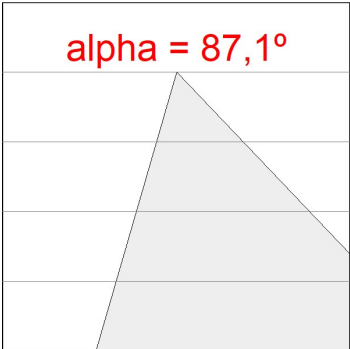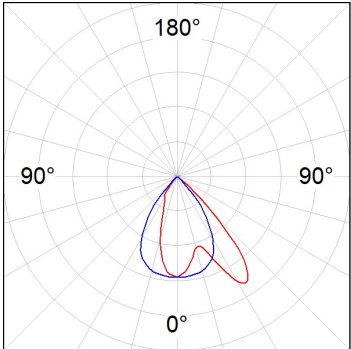

## ACCESSOIRES :

## Montage

**Code produit:**

F42JO

**Description:**

FIL45 ACC. SU/RE INTM JOINT B

**Code produit:**

F4COX/MMB

**Description:**

FIL 45 ACC. COVER X/MM BK.

**Code produit:**

F4COX/MMG

**Description:**

FIL 45 ACC. COVER X/MM GR.

**Code produit:**

F4COX/MMW

**Description:**

FIL 45 ACC. COVER X/MM WH.

**Code produit:**

F4PRREX/MMB

**Description:**

FIL 45 ACC. REC PROFIL X/MM BK.

**Code produit:**

F4PRREX/MMG

**Description:**

FIL 45 ACC. REC PROFIL X/MM GR.

**Code produit:**

F4PRREX/MMW

**Description:**

FIL 45 ACC. REC PROFIL X/MM WH.

**Code produit:**

F4REECB

**Description:**

FIL45 ACC. REC END COVER BK.

**Code produit:**

F4REECG

**Description:**

FIL45 ACC. REC END COVER GR.

**Code produit:**

F4REECW

**Description:**

FIL45 ACC. REC END COVER WH.



**Code produit:**

F4TORFG

**Description:**

FIL45 ACC. TOOL REMOVE REFLECTOR

## ACCESSOIRES :

### Optique



**Code produit:**

F4DIX/MMOP

**Description:**

FIL 45 ACC. OPAL DIFFUSER X/MM

## ACCESSOIRES :

### Contrôle et réglage



**Code produit:**

F41EMG3HDWB

**Description:**

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK



**Code produit:**

F41EMG3HDWG

**Description:**

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR



**Code produit:**

F41EMG3HDWW

**Description:**

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH



**Code produit:**

F41LIGHTSNDB

**Description:**

ACC.FIL45 SENSOR BASIC ILD DALI-2 BK



**Code produit:**

F41LIGHTSNDG

**Description:**

ACC.FIL45 SENSOR BASIC ILD DALI-2 GR



**Code produit:**

F41LIGHTSNDW

**Description:**

ACC.FIL45 SENSOR BASIC ILD DALI-2 WH