


## F42RE224MOTA930DB



## - FIL45 G2 REC 2240 2000 9WW TECH ASY D BK

**Description:**

LAMP recessed structure FIL45 G2 REC 2240. Manufactured from extruded aluminum with an 80% recycling rate, asymmetrical optic and black mat polycarbonate reflector TECH ULTRACONFORT to control light distribution and reduce glare UGR <15. Model for LED MID-POWER, colour temperature 3000K and IRC90. Electronic DALI gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 90.000 L80 B10. Available finishes: White, black and grey. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finition:** Noir mat RAL 9011

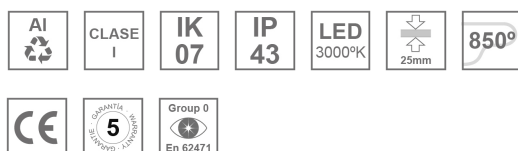
**Dimensions:** 2.238 x 55 x 76 mm

**Poids:** 5.360 g

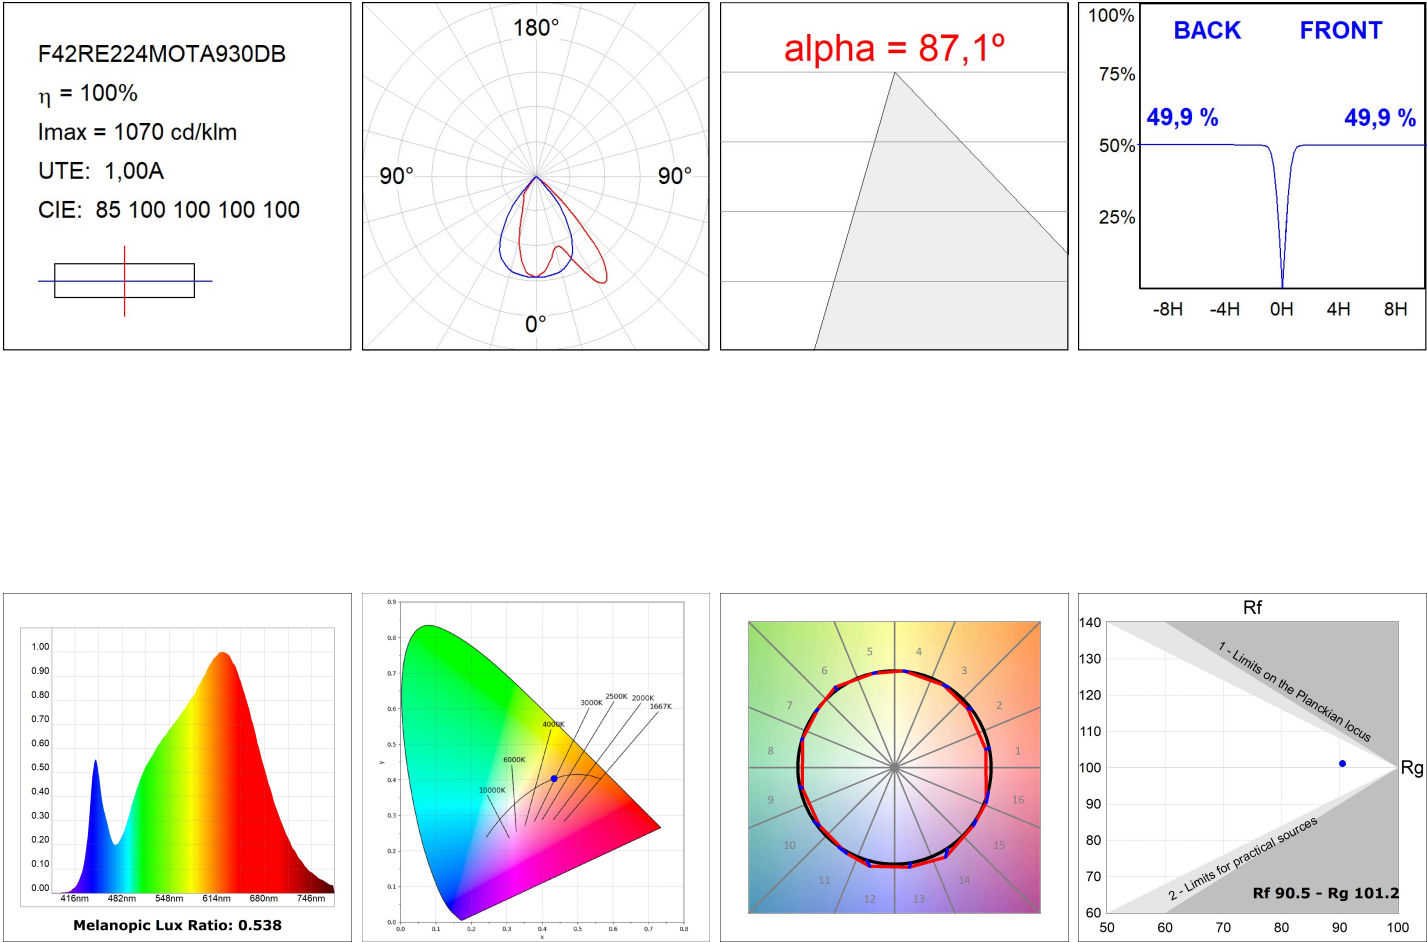
**Installation:** Encastré

**Mesures encastrement:** 2,246 x 51 x 0 mm
**SPÉCIFICATIONS TECHNIQUES:**

|                          |                          |                      |                  |
|--------------------------|--------------------------|----------------------|------------------|
| <b>Flux lumineux:</b>    | 2.858 lm                 | <b>%K :</b>          | 3000             |
| <b>Plum:</b>             | 29,7W                    | <b>IRC :</b>         | 90               |
| <b>Efficacité:</b>       | 96,2 lm/w                | <b>R9 :</b>          | 71               |
| <b>Type:</b>             | MID POWER                | <b>MacAdam:</b>      | 3                |
| <b>Durée de vie LED:</b> | 90.000 L80 B10 (Ta=25°C) | <b>Alimentation:</b> | 220-240V 50/60Hz |
| <b>Puissance:</b>        | 26W                      | <b>Équipement:</b>   | Réglable DALI    |

**Tolérance de flux lumineux +/- 10%**
**OPTIONS PERSONNALISABLES:**

DONNÉES PHOTOMÉTRIQUES :



## ACCESSOIRES :


## Montage

**Code produit:**

F42JO

**Description:**


FIL45 ACC. SU/RE INTM JOINT B

**Code produit:**

F4COX/MMB

**Description:**

FIL 45 ACC. COVER X/MM BK.

**Code produit:**

F4COX/MMG

**Description:**


FIL 45 ACC. COVER X/MM GR.

**Code produit:**

F4COX/MMW

**Description:**


FIL 45 ACC. COVER X/MM WH.

**Code produit:**

F4PRREX/MMB

**Description:**


FIL 45 ACC. REC PROFIL X/MM BK.

**Code produit:**

F4PRREX/MMG

**Description:**


FIL 45 ACC. REC PROFIL X/MM GR.

**Code produit:**

F4PRREX/MMW

**Description:**

FIL 45 ACC. REC PROFIL X/MM WH.

**Code produit:**

F4REECB

**Description:**

FIL45 ACC. REC END COVER BK.

**Code produit:**

F4REECG

**Description:**


FIL45 ACC. REC END COVER GR.

**Code produit:**

F4REECW

**Description:**

FIL45 ACC. REC END COVER WH.



**Code produit:**


F4TORFG

**Description:**

FIL45 ACC. TOOL REMOVE REFLECTOR

## ACCESSOIRES :

### Optique



**Code produit:**

F4DIX/MMOP

**Description:**

FIL 45 ACC. OPAL DIFFUSER X/MM

## ACCESSOIRES :

### Contrôle et réglage



**Code produit:**

F41EMG3HDWB

**Description:**

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H BK



**Code produit:**

F41EMG3HDWG

**Description:**

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H GR



**Code produit:**

F41EMG3HDWW

**Description:**

ACC.FIL45 DOWNLIGHT EMERGENCIA 3H WH




**Code produit:**

F41LIGHTSNDB

**Description:**

ACC.FIL45 SENSOR BASIC ILD DALI-2 BK



**Code produit:**

F41LIGHTSNDG

**Description:**

ACC.FIL45 SENSOR BASIC ILD DALI-2 GR



**Code produit:**

F41LIGHTSNDW

**Description:**

ACC.FIL45 SENSOR BASIC ILD DALI-2 WH