


F53RE112MOOP830NW

**FIL 50 G3 REC 1120 2600 WW OPAL WH****Description:**


LAMP recessed structure FIL 50 REC 1120. Manufactured from extruded recycled aluminum with a rate of 80%, with opal polycarbonate diffuser. Model for LED MID-POWER, colour temperature 3000K with CRI80 and with electronic gear included. IP43, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED lifetime: 72.000 L80 B10. White and grey finishes available. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Dimensions:** 1.123 x 66 x 67 mm**Weight:** 2.166 g**Installation:** Recessed**Recessing measures:** 1,133 x 52 x 80 mm**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.966 lm | °K : | 3000 |
| Plum: | 21,50W | CRI : | 80 |
| Efficacy: | 92,8 lm/w | MacAdam: | 3 |
| Type: | MID POWER LED | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 72.000 L80 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 17.9W | | |

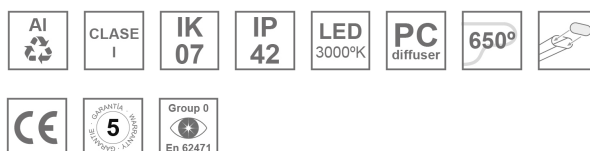Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

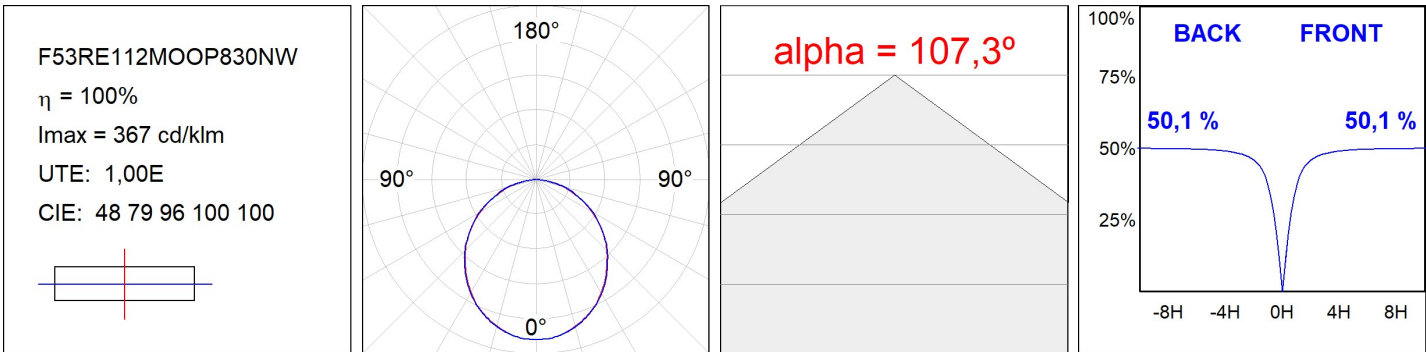

ACCESORIES :

Assembly



Product code:
ELWRST

Description:
ACC. ELECTROSTATICS WRIST STRAP



Product code:
F5COX/MMG
F5COX/MMW
F5PREX/MMG
F5PREX/MMW

Description:
FIL 50 ACC. COVER X/MM GR.
FIL 50 ACC. COVER X/MM WH.
FIL 50 ACC. REC PROFIL X/MM GR.
FIL 50 ACC. REC PROFIL X/MM WH.



Product code:
F5DIX/MMOP

Description:
FIL 50 ACC. OPAL DIFFUSER X/MM



Product code:
F5JO

Description:
ACC. INTM JOINT B



Product code:
F5REECG
F5REECW

Description:
FIL 50 ACC. REC END COVER GR.
FIL 50 ACC. REC END COVER WH.



Product code:
F5REHCG
F5REHCW

Description:
FIL 50 ACC. REC 90° CORNER GR.
FIL 50 ACC. REC 90° CORNER WH.