


F53RE168HOPR830DW




FIL 50 G3 REC 1680 9300 WW PRISM DALI WH

Description:

LAMP recessed structure FIL 50 REC 1680. Manufactured from extruded aluminum with an 80% recycling rate, diffuser made of prismatic polycarbonate to control light distribution and reduce glare UGR<19. Model for MID-POWER LED, warm white colour temperature and control gear included. With opal polycarbonate diffuser. With a IP43, IK07 protection rating. Insulation class I. Photobiological safety group 0. LED lifetime: 72.000 L80 B10. White and grey finishes available. Environmental Product Declaration - EPD available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

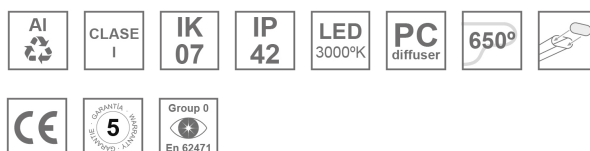Finish: Matte white RAL 9010**Dimensions:** 1.683 x 66 x 67 mm**Weight:** 2.860 g**Installation:** Recessed**Recessing measures:** 1,693 x 52 x 80 mm**TECHNICAL SPECIFICATIONS:****Light output:** 6.672 lm**°K :** 3000**Plum:** 59,10W**CRI :** 80**Efficacy:** 112,9 lm/w**MacAdam:** 3**UGR:** <19**Power Supply:** 220-240V 50/60Hz**Type:** MID POWER LED**Gear:** Adjustable DALI**LED Lifetime:** 72.000 L80 B10 (Ta=25°C)**Power:** 53.7W**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

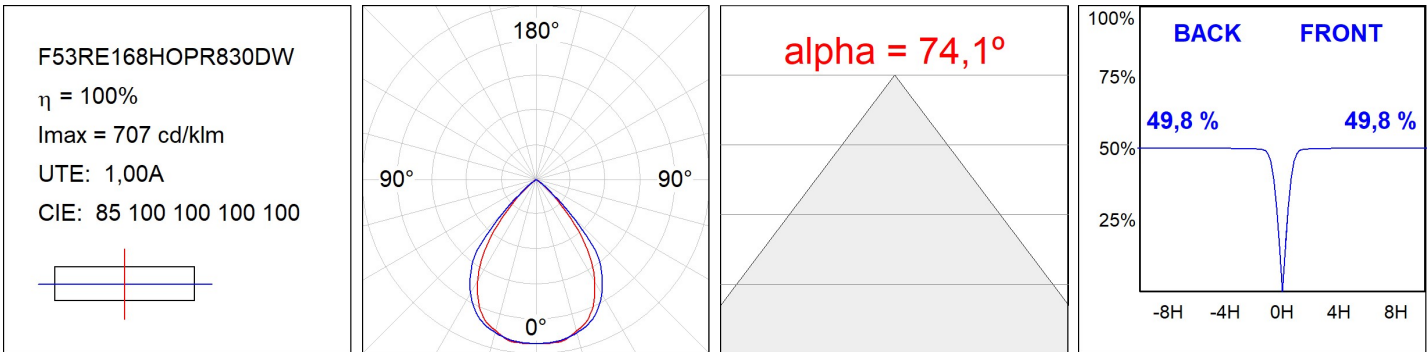

ACCESORIES :

Assembly



Product code:

ELWRST

Description:

ACC. ELECTROSTATICS WRIST STRAP



Product code:

F5COX/MMG

F5COX/MMW

F5PRREX/MMG

F5PRREX/MMW

Description:

FIL 50 ACC. COVER X/MM GR.

FIL 50 ACC. COVER X/MM WH.

FIL 50 ACC. REC PROFIL X/MM GR.

FIL 50 ACC. REC PROFIL X/MM WH.




Product code:

F5JO

Description:

ACC. INTM JOINT B



Product code:


F5REECG

F5REECW

Description:

FIL 50 ACC. REC END COVER GR.

FIL 50 ACC. REC END COVER WH.



Product code:

F5REHCG

F5REHCW

Description:

FIL 50 ACC. REC 90° CORNER GR.

FIL 50 ACC. REC 90° CORNER WH.