Product datasheet

HANCE DOWNLIGHT

HD2SR07SS930NB



HANCE G2 DOWN SEMIREC 700 9WW SSP BK

Description:

LAMP multidirectional semi-recessed downlight HANCE G2 DOWN SEMIREC 700. Allowing 355° rotation and tilting up to 85°. Body and frame made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 10° super spot polycarbonate optics. LED HIGH POWER, 3000K and CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 60.000 L90B10 (Ta=25°C). Available finishes: Textured white and textured black.



Finish: Texturised black RAL 9011

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	438 lm	°K :	3000
Plum:	8,6W	CRI :	90
Efficacy:	51 lm/w	R9 :	53
UGR:	<16	MacAdam:	3
Туре:	HIGH POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L90B10 (Ta=25°C)	Gear:	Electronic
Power:	7W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light

Product datasheet


HANCE DOWNLIGHT


HD2SR07SS930NB

HANCE G2 DOWN SEMIREC 700 9WW SSP BK



PHOTOMETRIC DATA :

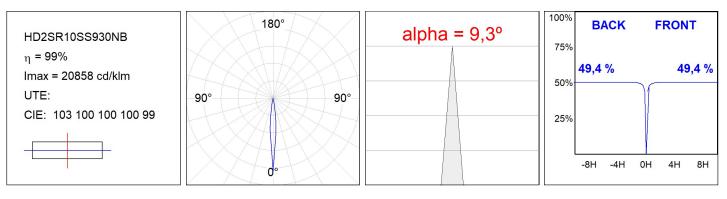

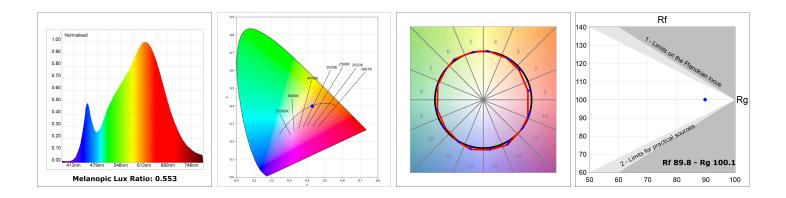

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es