


HS2SF20MF840NB



HANCE G2 SUR 2000 NW MFL BK

Description:

LAMP surface multidirectional spotlight HANCE G2 SUR 2000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 4000K y CRI80. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class I. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

Finish: Texturised black RAL 9011

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.402 lm	°K :	4000
Plum:	20,8W	CRI :	80
Efficacy:	115,5 lm/w	R9 :	66
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80B10 (Ta=25°C)	Gear:	Electronic
Power:	18W		

Light output tolerance +/- 10%




CUSTOM MADE OPTIONS:



HS2SF20MF840NB

HANCE G2 SUR 2000 NW MFL BK

PHOTOMETRIC DATA :

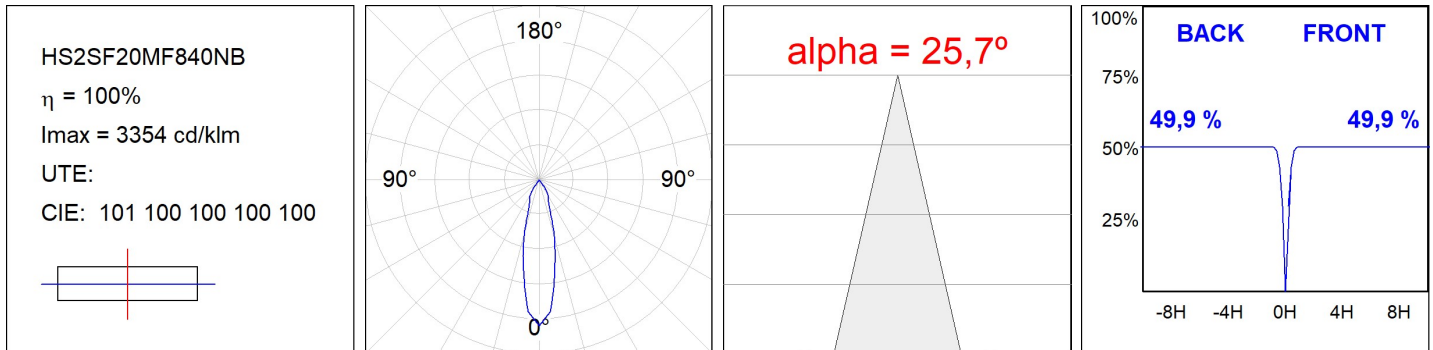

ACCESORIES :

Optical



Product code:

HSCU50

Description:

HANCE 1000/2000 ACC. CUTTING BEAM



Product code:

HSO50

Description:

HANCE 1000/2000 ACC. HONEYCOMB GRILLE



Product code:

HSRI65C

Description:

HANCE 1000/2000 ACC. RING DECO CO.



Product code:

HSRI65M

Description:

HANCE 1000/2000 ACC. RING DECO MET.



Product code:

HSRI65W

Description:

HANCE 1000/2000 ACC. RING DECO WH.



Product code:

HSSL50

Description:

HANCE 1000/2000 ACC. SOFT LENS



Product code:

HSTR50

Description:

HANCE 1000/2000 ACC. DIF TRANS