


HS2SF30MF840DB



HANCE G2 SUR 3000 NW MFL DALI BK

**Description:**

LAMP surface multidirectional spotlight HANCE G2 SUR 3000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 4000K and CRI80. Electronic DALI control gear included. IP20, IK07 ratings. Insulation Class I. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

**Finish:** Texturised black RAL 9011

**Installation:** Surface

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	3.549 lm	<b>°K :</b>	4000
<b>Plum:</b>	28,3W	<b>CRI :</b>	80
<b>Efficacy:</b>	125,4 lm/w	<b>R9 :</b>	64
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	72.000 L80B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	25W		

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**






HS2SF30MF840DB

HANCE G2 SUR 3000 NW MFL DALI BK

PHOTOMETRIC DATA :

HS2SF30MF840DB  
 $\eta = 100\%$   
 $I_{max} = 3926 \text{ cd/klm}$   
UTE:  
CIE: 101 100 100 100 100

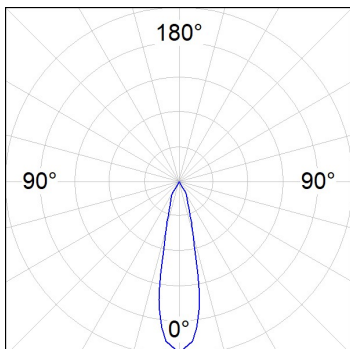

---

**ACCESORIES :**

**Optical**



**Product code:**

HSSL50

**Description:**

HANCE 1000/2000 ACC. SOFT LENS