


HS2SF30SP930DB



HANCE G2 SUR 3000 9WW SP DALI BK

Description:

LAMP surface multidirectional spotlight HANCE G2 SUR3000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 20° spot reflector. LED COB, 3000K and CRI90. Electronic DALI control gear included. IP20, IK07 ratings. Insulation Class I. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.


Finish: Texturised black RAL 9011

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.759 lm	°K :	3000
Plum:	28,3W	CRI :	90
Efficacy:	97,5 lm/w	R9 :	61
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	25W		

Light output tolerance +/- 10%

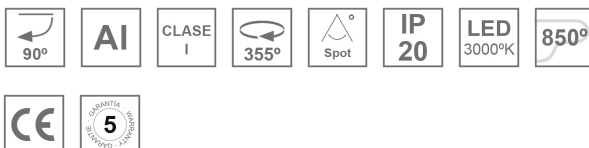

CUSTOM MADE OPTIONS:










HS2SF30SP930DB

HANCE G2 SUR 3000 9WW SP DALI BK

PHOTOMETRIC DATA :

HS2SF30SP930DB
 $\eta = 100\%$
 $I_{max} = 5192 \text{ cd/klm}$
 UTE:
 CIE: 102 100 100 100 100

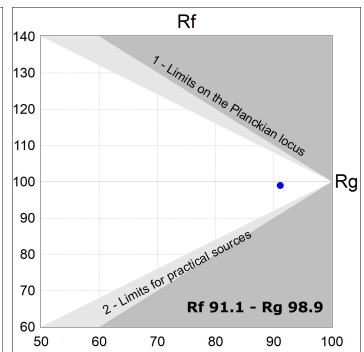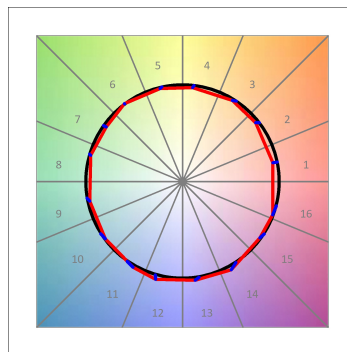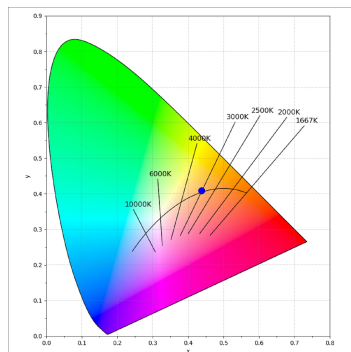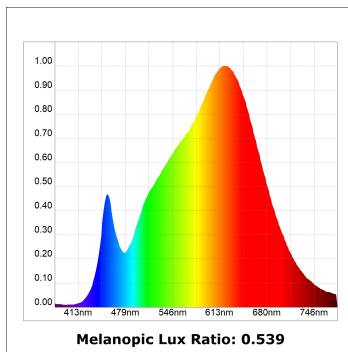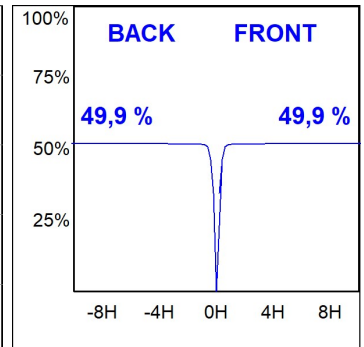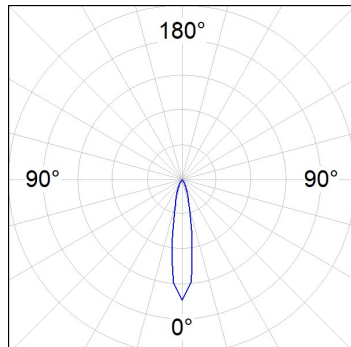

ACCESORIES :

Optical



Product code:

HSSL50

Description:

HANCE 1000/2000 ACC. SOFT LENS