


HS2SR10MF840DB



**HANCE G2 SEMIREC 1000 NW MFL DALI BK**

**Description:**

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 1000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 4000K and CRI80. Electronic DALI control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 78.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

**Finish:** Texturised black RAL 9011

**Installation:** Semi-Recessed

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.083 lm	<b>°K :</b>	4000
<b>Plum:</b>	8,6W	<b>CRI :</b>	80
<b>Efficacy:</b>	125,9 lm/w	<b>R9 :</b>	66
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	78.000 L80B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	7W		

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**






HS2SR10MF840DB

HANCE G2 SEMIREC 1000 NW MFL DALI BK

PHOTOMETRIC DATA :

HS2SR10MF840DB  
 $\eta = 100\%$   
 $I_{max} = 3354 \text{ cd/klm}$   
UTE:  
CIE: 101 100 100 100 100

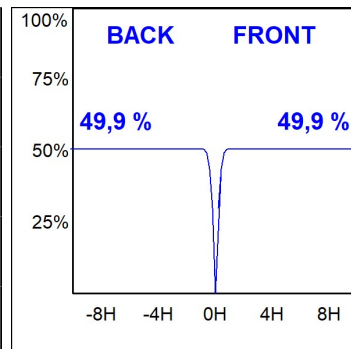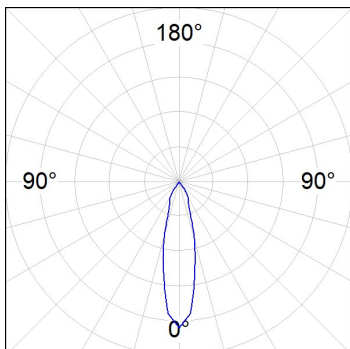

**ACCESORIES :**

**Optical**



**Product code:**  
HSCU50

**Description:**  
HANCE 1000/2000 ACC. CUTTING BEAM



**Product code:**  
HSHO50

**Description:**  
HANCE 1000/2000 ACC. HONEYCOMB GRILLE



**Product code:**  
HSRI65C

**Description:**  
HANCE 1000/2000 ACC. RING DECO CO.



**Product code:**  
HSRI65M

**Description:**  
HANCE 1000/2000 ACC. RING DECO MET.



**Product code:**  
HSRI65W

**Description:**  
HANCE 1000/2000 ACC. RING DECO WH.



**Product code:**  
HSSL50

**Description:**  
HANCE 1000/2000 ACC. SOFT LENS



**Product code:**  
HSTR50

**Description:**  
HANCE 1000/2000 ACC. DIF TRANS