

HS2SR10SS930NB



HANCE G2 SEMIREC 1000 9WW SSP BK

Description:

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 1000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 10° super spot polycarbonate optics. LED HIGH POWER, 3000K y CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 50.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.


Finish: Texturised black RAL 9011

Installation: Semi-Recessed

TECHNICAL SPECIFICATIONS:

Light output:	652 lm	°K :	3000
Plum:	13,9W	CRI :	90
Efficacy:	46,9 lm/w	R9 :	53
UGR:	<16	MacAdam:	3
Type:	HIGH POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80B10 (Ta=25°C)	Gear:	Electronic
Power:	13W		


Light output tolerance +/- 10%

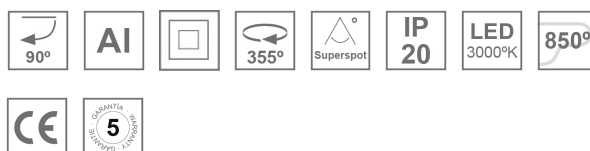**CUSTOM MADE OPTIONS:**

HS2SR10SS930NB

HANCE G2 SEMIREC 1000 9WW SSP BK

PHOTOMETRIC DATA :

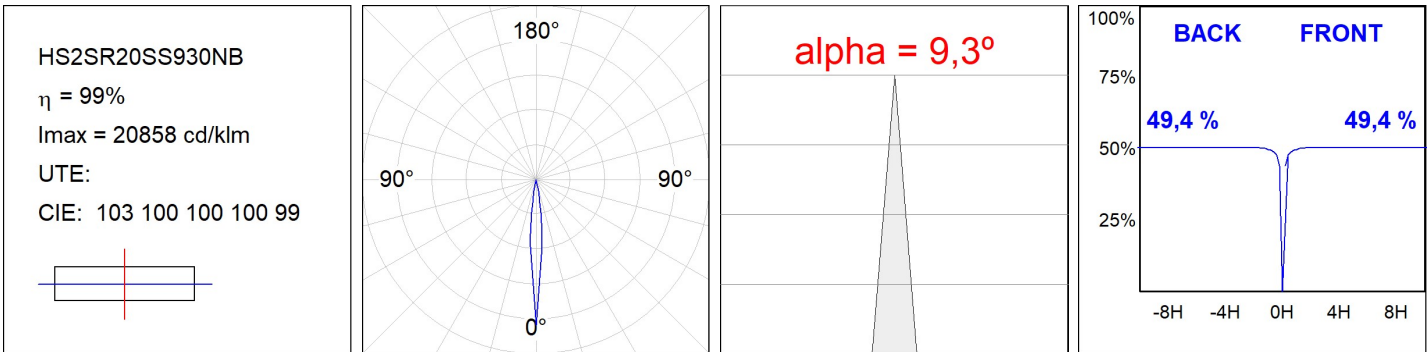

ACCESORIES :**Optical****Product code:**

HSCU50

Description:

HANCE 1000/2000 ACC. CUTTING BEAM

**Product code:**

HSHO50

Description:

HANCE 1000/2000 ACC. HONEYCOMB GRILLE

**Product code:**

HSRI65B

Description:

HANCE 1000/2000 ACC. RING DECO BK.

**Product code:**

HSRI65C

Description:

HANCE 1000/2000 ACC. RING DECO CO.

**Product code:**

HSRI65M

Description:

HANCE 1000/2000 ACC. RING DECO MET.

**Product code:**

HSRI65W

Description:

HANCE 1000/2000 ACC. RING DECO WH.

**Product code:**

HSSL50

Description:

HANCE 1000/2000 ACC. SOFT LENS

**Product code:**

HSTR50

Description:

HANCE 1000/2000 ACC. DIF TRANS