

**HS2SR20FL930DB**




**HANCE G2 SEMIREC 2000 9WW FL DALI BK**

**Description:**

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 2000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 35° flood reflector. LED COB, 3000K and CRI90. Electronic DALI control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

**Finish:** Texturised black RAL 9011

**Installation:** Semi-Recessed



**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.918 lm	<b>°K :</b>	3000
<b>Plum:</b>	20,8W	<b>CRI :</b>	90
<b>Efficacy:</b>	92,2 lm/w	<b>R9 :</b>	60
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	72.000 L80B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	18W	<b>Gear:</b>	Adjustable DALI

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**


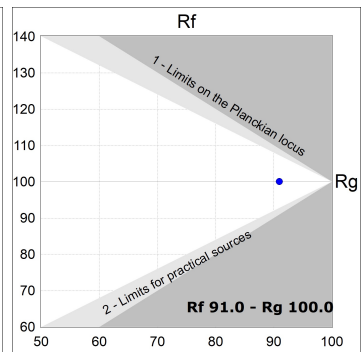
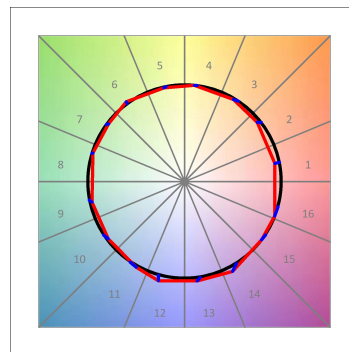
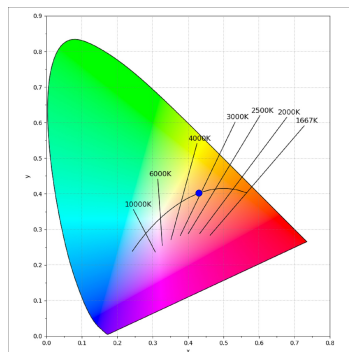
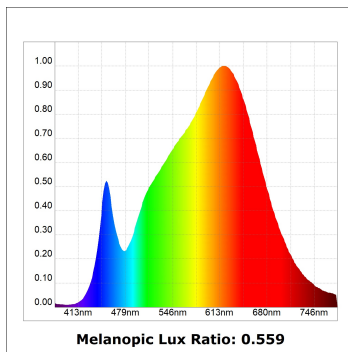
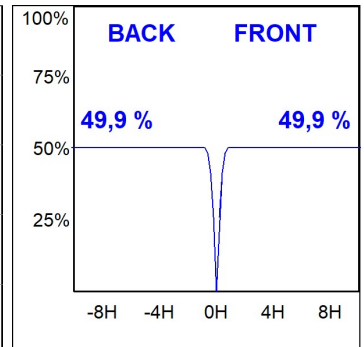
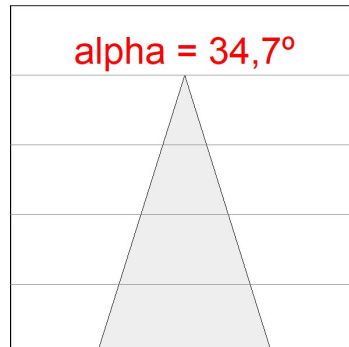
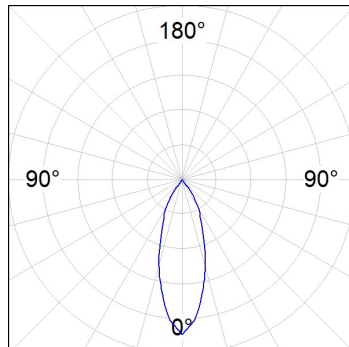


HS2SR20FL930DB

HANCE G2 SEMIREC 2000 9WW FL DALI BK

PHOTOMETRIC DATA :

HS2SR20FL930DB  
 $\eta = 100\%$   
 $I_{max} = 2218 \text{ cd/klm}$   
 UTE:  
 CIE: 100 100 100 100 100

**ACCESORIES :**

**Optical**



**Product code:**  
HSCU50

**Description:**  
HANCE 1000/2000 ACC. CUTTING BEAM



**Product code:**  
HSHO50

**Description:**  
HANCE 1000/2000 ACC. HONEYCOMB GRILLE



**Product code:**  
HSRI65C

**Description:**  
HANCE 1000/2000 ACC. RING DECO CO.



**Product code:**  
HSRI65M

**Description:**  
HANCE 1000/2000 ACC. RING DECO MET.



**Product code:**  
HSRI65W

**Description:**  
HANCE 1000/2000 ACC. RING DECO WH.



**Product code:**  
HSSL50

**Description:**  
HANCE 1000/2000 ACC. SOFT LENS



**Product code:**  
HSTR50

**Description:**  
HANCE 1000/2000 ACC. DIF TRANS