


HS2SR40FL940NB



HANCE G2 SEMIREC 4000 9NW FL BK

Description:

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 4000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 35° flood reflector. LED COB, 4000K y CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

Finish: Texturised black RAL 9011

Installation: Semi-Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|-------------------------|----------------------|------------------|
| Light output: | 3.800 lm | °K : | 4000 |
| Plum: | 36,7W | CRI : | 90 |
| Efficacy: | 103,5 lm/w | R9 : | 64 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 72.000 L80B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 33W | Gear: | Electronic |

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:










HS2SR40FL940NB

HANCE G2 SEMIREC 4000 9NW FL BK

PHOTOMETRIC DATA :

HS2SR40FL940NB
 $\eta = 100\%$
 $I_{max} = 2005 \text{ cd/klm}$
 UTE:
 CIE: 100 100 100 100 100

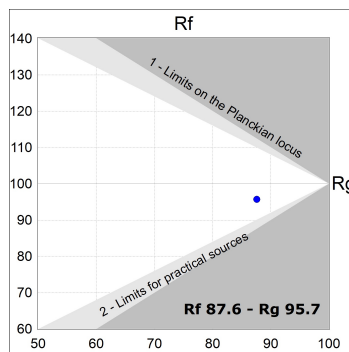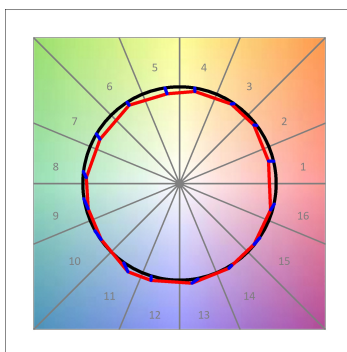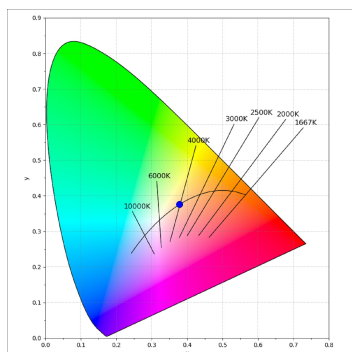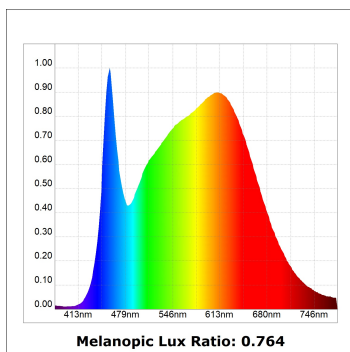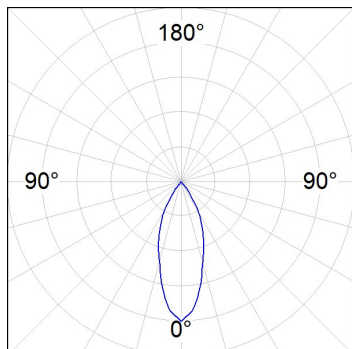

ACCESORIES :

Optical



Product code:

HSSL50

Description:

HANCE 1000/2000 ACC. SOFT LENS