

KOMBIC 100 DOWNLIGHT


K11RD1523RF930DMW

- KOMBIC 100 RD 1500 IP23 9WW RF FL DA M/W



Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic DALI wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: metalized polycarbonate mate


Weight: 382 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.382 lm	°K :	3000
Plum:	14,2W		
Efficacy:	97,3 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	13W		

Light output tolerance +/- 10%

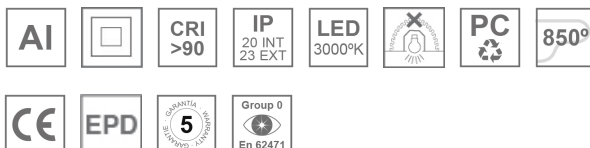

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD1523RF930DMW

KOMBIC 100 RD 1500 IP23 9WW RF FL DA M/W

PHOTOMETRIC DATA :

K11RD1523RF930DMW
 $\eta = 100\%$
 $I_{max} = 2200 \text{ cd/klm}$
 UTE:
 CIE: 98 99 100 100 100

