

KOMBIC 100 SURFACE

[K11SF1523RF927NMW](#)

- KOMBIC 100 SF 1500 IP23 9VWW RF FL MA/WH

Description:

Finish: metalized polycarbonate mate

Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.325 lm	°K :	2700
Plum:	14,1W	CRI :	90
Efficacy:	93,9 lm/w	R9 :	58
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	13W		

Light output tolerance +/- 10%










KOMBIC 100 SURFACE

K11SF1523RF927NMW

KOMBIC 100 SF 1500 IP23 9VWW RF FL MA/WH

PHOTOMETRIC DATA :

K11SF1523RF927NMW
 $\eta = 100\%$
 $I_{max} = 2200 \text{ cd/klm}$
 UTE:
 CIE: 98 99 100 100 100

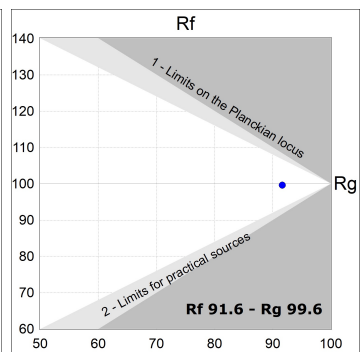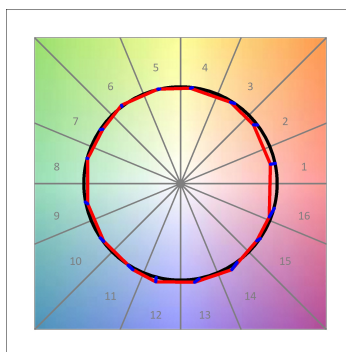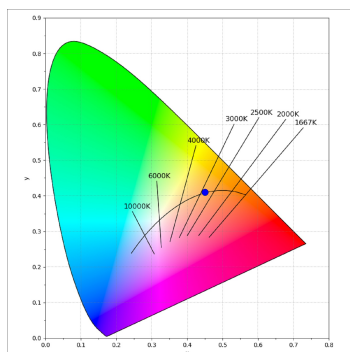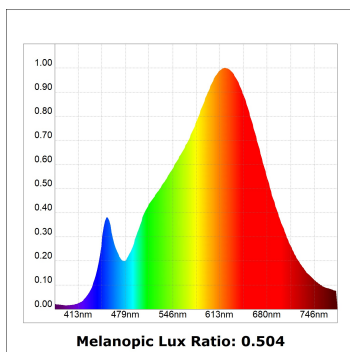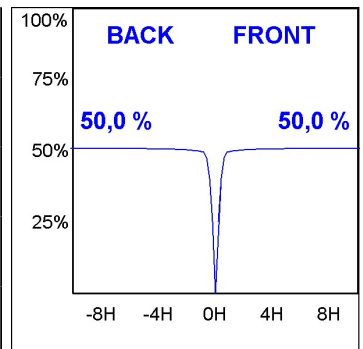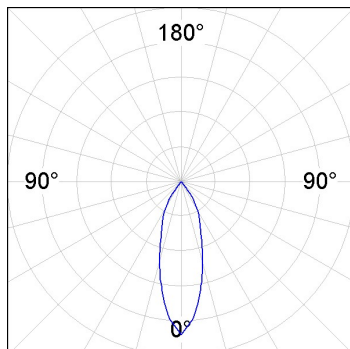

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH