

KOMBIC 100 SURFACE

K11SF1523RF940DWW




KOMBIC 100 SF 1500 IP23 9NW RF FL DA W/W

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic DALI wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Weight: 712 g



Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.474 lm	°K :	4000
Plum:	13,9W	CRI :	90
Efficacy:	106 lm/w	R9 :	65
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:










KOMBIC 100 SURFACE

K11SF1523RF940DWW

KOMBIC 100 SF 1500 IP23 9NW RF FL DA W/W

PHOTOMETRIC DATA :

K11SF1523RF940DWW
 $\eta = 100\%$
 $I_{max} = 2200 \text{ cd/klm}$
 UTE:
 CIE: 98 99 100 100 100

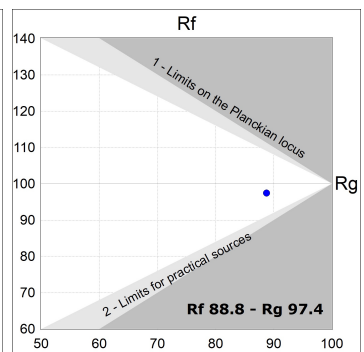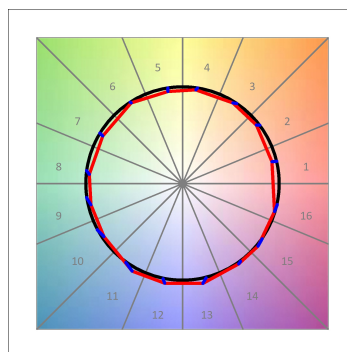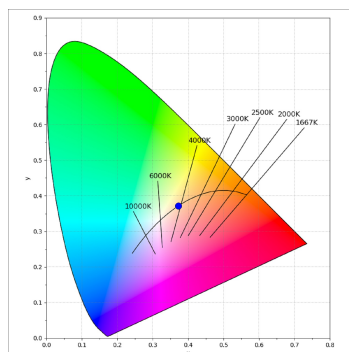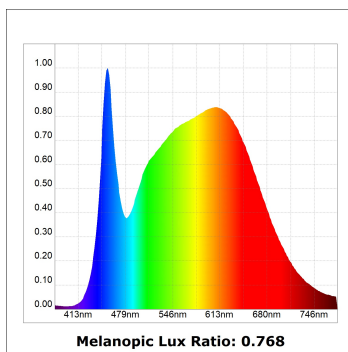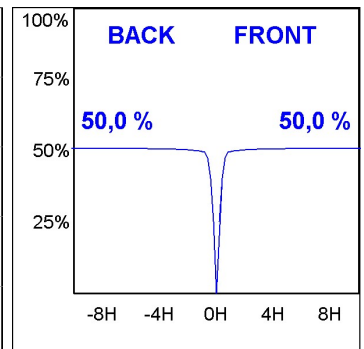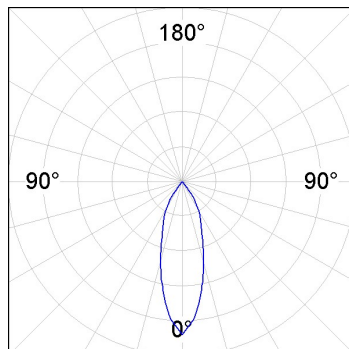

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH