

# KOMBIC 100 SURFACE

K11SF1523RF940NBB




**KOMBIC 100 SF 1500 IP23 9NW RF FL BK/BK**

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011

**Weight:** 502 g



**Installation:** Surface

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.416 lm	<b>°K :</b>	4000
<b>Plum:</b>	14,1W	<b>CRI :</b>	90
<b>Efficacy:</b>	100,4 lm/w	<b>R9 :</b>	65
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	13W		

*Light output tolerance +/- 10%*



**CUSTOM MADE OPTIONS:**










# KOMBIC 100 SURFACE

K11SF1523RF940NBB

KOMBIC 100 SF 1500 IP23 9NW RF FL BK/BK

**PHOTOMETRIC DATA :**

K11SF1523RF940NBB  
 $\eta = 100\%$   
 $I_{max} = 2279 \text{ cd/klm}$   
 UTE:  
 CIE: 100 100 100 100 100

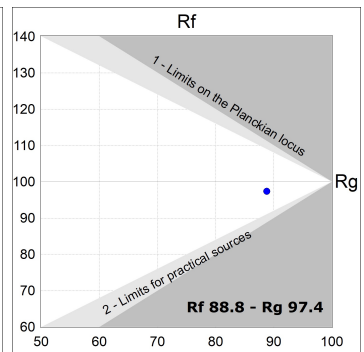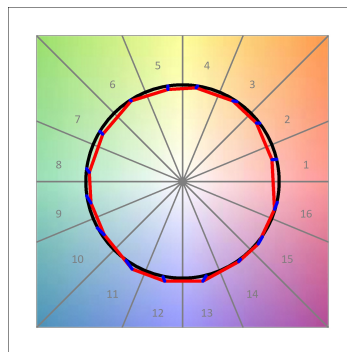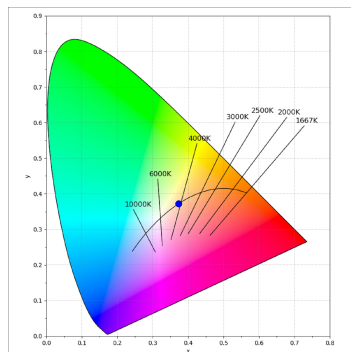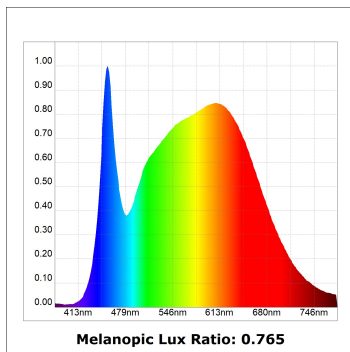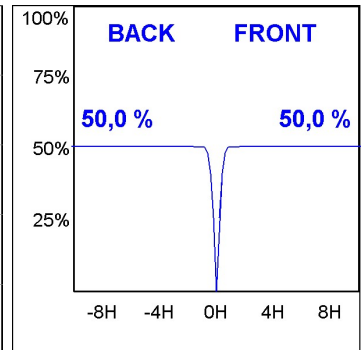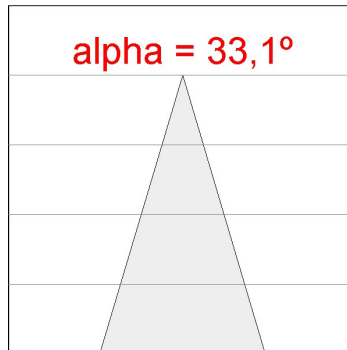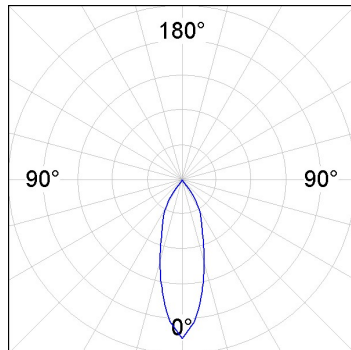

**ACCESORIES :**

**Suspension**



**Product code:**  
K11SUADLATBK

**Description:**  
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



**Product code:**  
K11SUADLATWH

**Description:**  
KOMBIC 100 SF ADAPT. LATERAL CABLE WH