

KOMBIC 100 SURFACE

[K11SF1523RW930NMW](#)

- KOMBIC 100 SF 1500 IP23 9WW RF WFL MA/WH

Description:

Finish: metalized polycarbonate mate

Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.318 lm	°K :	3000
Plum:	14,1W	CRI :	90
Efficacy:	93,5 lm/w	R9 :	53
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Electronic

Light output tolerance +/- 10%









KOMBIC 100 SURFACE

K11SF1523RW930NMW

KOMBIC 100 SF 1500 IP23 9WW RF WFL MA/WH

PHOTOMETRIC DATA :

K11SF1523RW930NMW
 $\eta = 100\%$
 $I_{max} = 1215 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 94 97 99 100 100

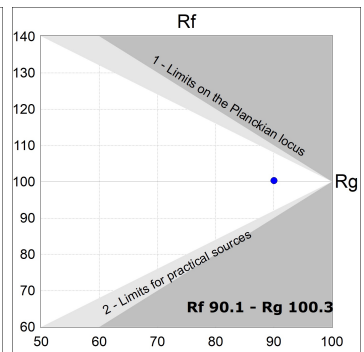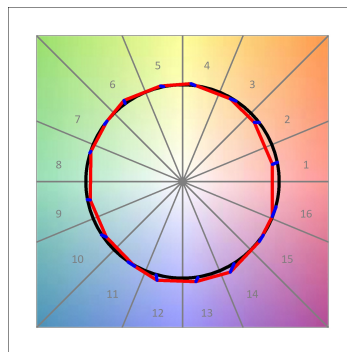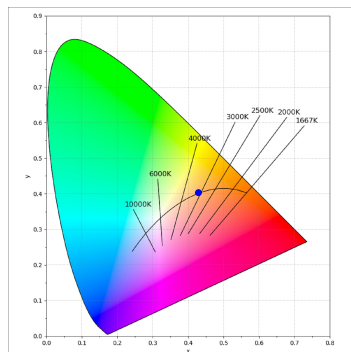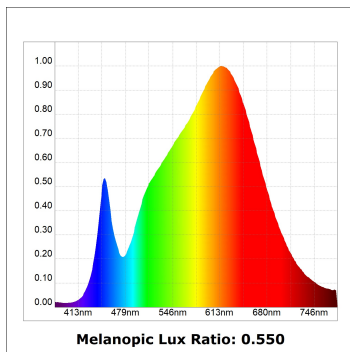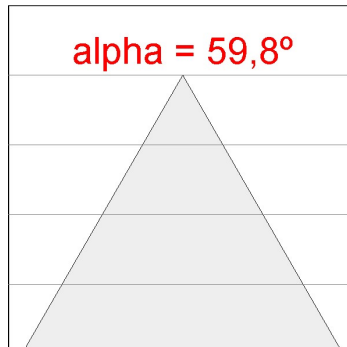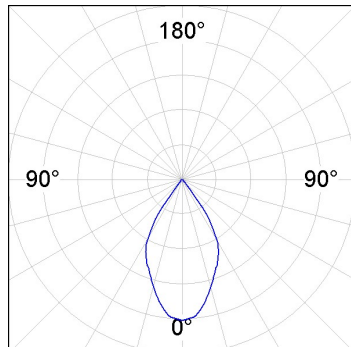

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH