


K11SF1540OP940DMB



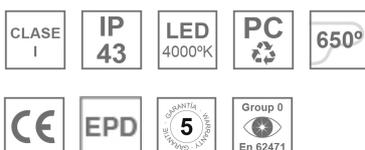
KOMBIC 100 SF 1500 IP43 9NW OP DA MA/BK

Description:

LAMP Suspended or ceiling mounting downlight model KOMBIC 100 SF 1500. Body made of black aluminum extrusion with white polycarbonate reflector and optical film. Injected aluminum heat sink. Model for COB LED, with 3000K temperature, CRI90 and control DALI gear included. IP43 protection rating. Insulation class I. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finition: polycarbonate métallisé mate**Poids:** 720 g**Installation:** Surface**SPÉCIFICATIONS TECHNIQUES:**

Flux lumineux:	1.310 lm	°K :	4000
Plum:	13,7W	IRC :	90
Efficacité:	59,6 lm/w	R9 :	65
Type:	COB	MacAdam:	3
Durée de vie LED:	50.000 L80 B10 (Ta=25°C)	Alimentation:	220-240V 50/60Hz
Puissance:	12W	Équipement:	Réglable DALI

Tolérance de flux lumineux +/- 10%**OPTIONS PERSONNALISABLES:**

ACCESSOIRES :

Suspension



Code produit:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Code produit:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH