KOMBIC 100 SURFACE

K11SF2023RF930DBB

- KOMBIC 100 SF 2000 IP23 9WW RF FL DA B/B

Description:

Finish: Matte black RAL 9011 Weight: 712 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.785 lm	°K :	3000	
Plum:	20W	CRI :	90	
Efficacy:	84 lm/w	MacAdam:	3	
UGR:	<19	Power Supply:	220-240V 50/60Hz	
Туре:	СОВ	Gear:	Adjustable DALI	
LED Lifetime:	50.000 L70 B10 (Ta=25⁰C)			
Power:	19W			

Light output tolerance +/- 10%

EPD

Worktitude for light


KOMBIC 100 SURFACE


K11SF2023RF930DBB

KOMBIC 100 SF 2000 IP23 9WW RF FL DA B/B



PHOTOMETRIC DATA :

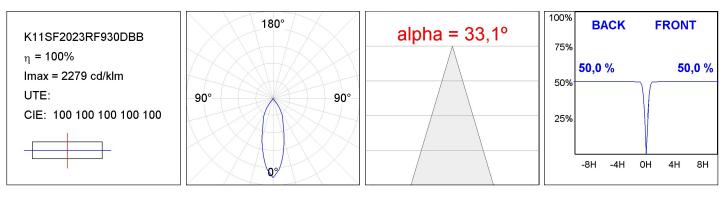

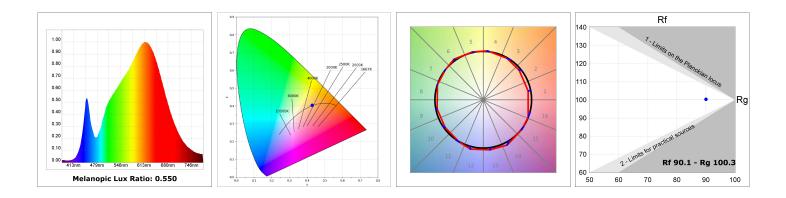

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light