

KOMBIC 100 SURFACE

[K11SF2023RW830NMW](#)

- KOMBIC 100 SF 2000 IP23 WW RF WFL MA/WH

Description:

Finish: metalized polycarbonate mate

Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.538 lm | °K : | 3000 |
| Plum: | 14,1W | CRI : | 80 |
| Efficacy: | 109 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 13W | | |

Light output tolerance +/- 10%




KOMBIC 100 SURFACE

K11SF2023RW830NMW

KOMBIC 100 SF 2000 IP23 WW RF WFL MA/WH

PHOTOMETRIC DATA :

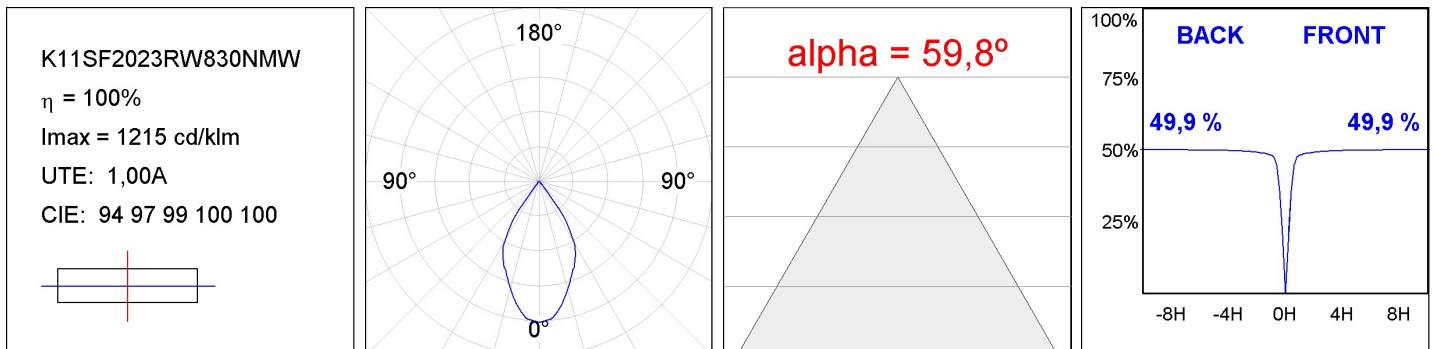

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH