

KOMBIC 100 SURFACE

K11SF2023RW840NBB

- KOMBIC 100 SF 2000 IP23 NW RF WFL BK/BK



Description:

Finish: Matte black RAL 9011

Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.491 lm	°K :	4000
Plum:	14,1W	CRI :	80
Efficacy:	105,7 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Electronic
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	13W		

Light output tolerance +/- 10%






KOMBIC 100 SURFACE

K11SF2023RW840NBB

KOMBIC 100 SF 2000 IP23 NW RF WFL BK/BK

PHOTOMETRIC DATA :

K11SF2023RW840NBB
 $\eta = 100\%$
 $I_{max} = 1293 \text{ cd/klm}$
UTE:
CIE: 99 100 100 100 100

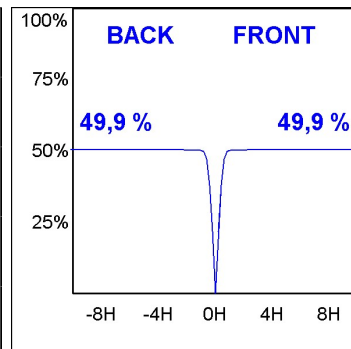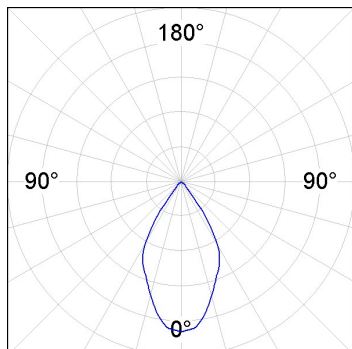

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH