

KOMBIC 100 SURFACE

K11SF2523RF830DMB

- KOMBIC 100 SF 2500 IP23 WW RF FL DA M/B

Description:

Finish: metalized polycarbonate mate

Weight: 712 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.208 lm	°K :	3000
Plum:	20W	CRI :	80
Efficacy:	104,1 lm/w	R9 :	80
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		


Light output tolerance +/- 10%



K11SF2523RF830DMB

KOMBIC 100 SF 2500 IP23 WW RF FL DA M/B

PHOTOMETRIC DATA :

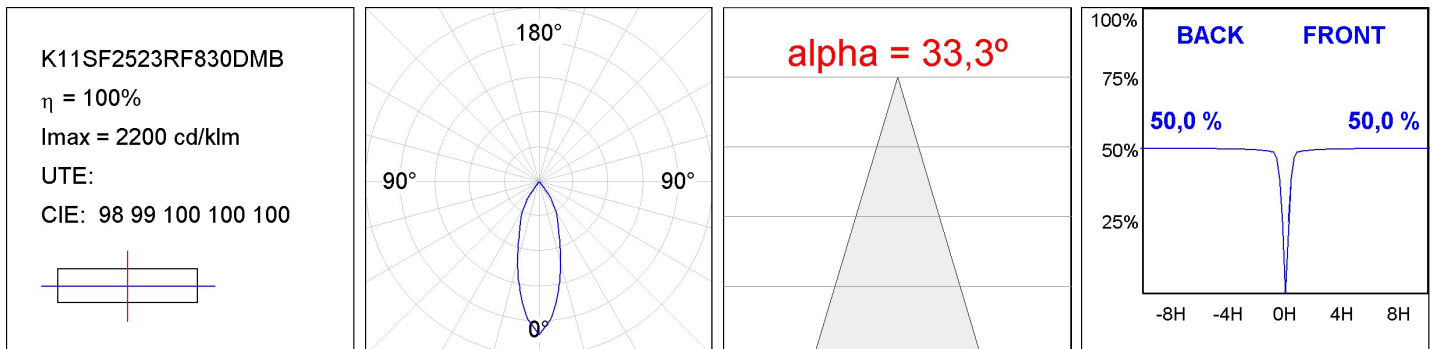

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH