

K11SF2523RW830DMW

- KOMBIC 100 SF 2500 IP23 WW RF WFL DA M/W

Description:

Finish: metalized polycarbonate mate

Weight: 712 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 2.081 lm | °K : | 3000 |
| Plum: | 20W | CRI : | 80 |
| Efficacy: | 104 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L70 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 19W | | |

Light output tolerance +/- 10%




KOMBIC 100 SURFACE

K11SF2523RW830DMW

KOMBIC 100 SF 2500 IP23 WW RF WFL DA M/W

PHOTOMETRIC DATA :

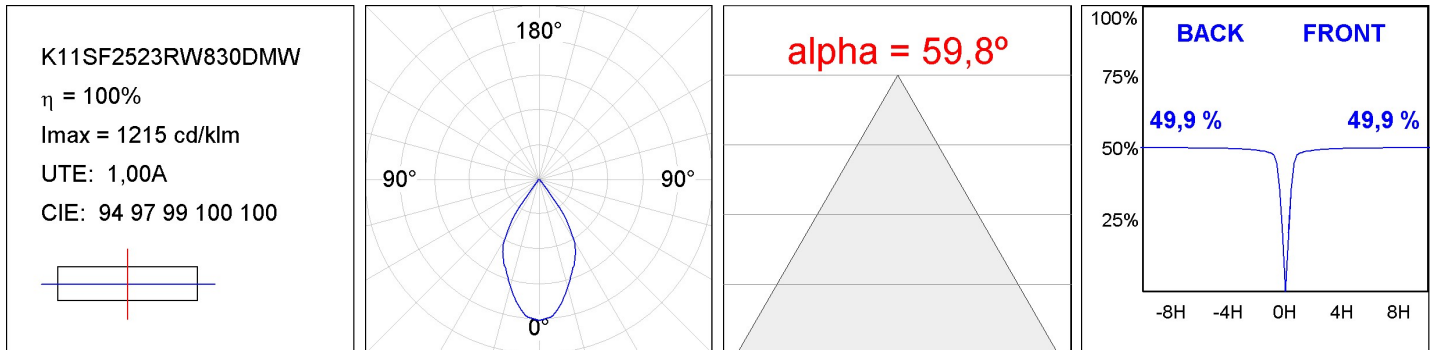

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH