KOMBIC 100 SUT

K11ST1523RW930NMW

- KOMBIC 100 SUT 1500 IP23 9WW RF WFL M/W

Description:

Finish: metalized polycarbonate mate Weight: 502 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.318 lm	⁰К:	3000
Plum:	14,1W	CRI :	90
Efficacy:	93,5 lm/w	R9 :	53
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Electronic

Light output tolerance +/- 10%

EPD

Worktitude for light


KOMBIC 100 SUT


K11ST1523RW930NMW

KOMBIC 100 SUT 1500 IP23 9WW RF WFL M/W



PHOTOMETRIC DATA :

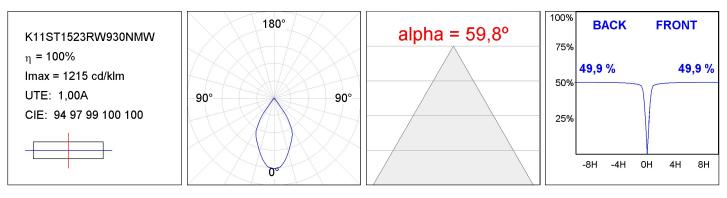

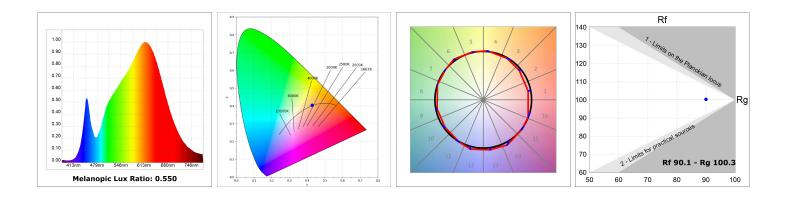

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es