


K11ST2040WF840DBW



## KOMBIC 100 SUT 2000 IP40 NW WFL DA BK/WH

## Description:

Suspended track mounting downlight model KOMBIC 100 SUT by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI80. Luminaire with electronic wiring Dali included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP40 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.


Finish: Matte black RAL 9011

Installation: Suspended

## TECHNICAL SPECIFICATIONS:

|               |                          |               |                  |
|---------------|--------------------------|---------------|------------------|
| Light output: | 1.277 lm                 | °K :          | 4000             |
| Plum:         | 14,8W                    | CRI :         | 80               |
| Efficacy:     | 86,3 lm/w                | MacAdam:      | 3                |
| UGR:          | <19                      | Power Supply: | 220-240V 50/60Hz |
| Type:         | COB                      | Gear:         | Adjustable DALI  |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) |               |                  |
| Power:        | 12W                      |               |                  |

Light output tolerance +/- 10%

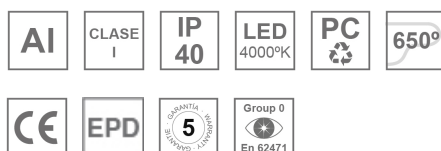

## CUSTOM MADE OPTIONS:



KOMBIC 100 SUT

TECHNICAL DATA ON REVIEW

K11ST2040WF840DBW

KOMBIC 100 SUT 2000 IP40 NW WFL DA BK/WH

PHOTOMETRIC DATA :

