

KOMBIC 150 DOWNLIGHT

K21RD2023RW930DWW



KOMBIC 150 RD 2400 IP23 9WW RF WF DA W/W


Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

Finish: Matte white RAL 9010

Weight: 704 g


Installation: Recessed



TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 2.112 lm | °K : | 3000 |
| Plum: | 19,1W | CRI : | 90 |
| Efficacy: | 110,6 lm/w | R9 : | 54 |
| UGR: | <19 | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 66.000 L90 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 17W | | |

Light output tolerance +/- 10%

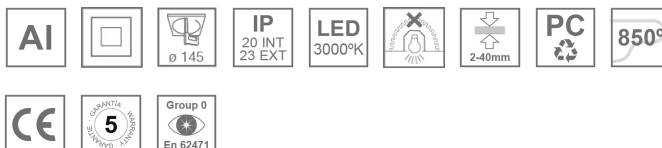

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2023RW930DWW

KOMBIC 150 RD 2400 IP23 9WW RF WF DA W/W

PHOTOMETRIC DATA :

