

KOMBIC 70 DOWNLIGHT



K711523RF927DWW



- KOMBIC 70 1500 IP23 9VWW RF FL DA WH/WH

Description:

KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic DALI wiring included. Insulation class II. LED life time: 66000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector Flood to achieve a controlled light distribution and low glare level, less than UGR<19



Finish: Matte white RAL 9010


Weight: 190 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 959 lm | °K : | 2700 |
| Plum: | 9,5W | CRI : | 90 |
| Efficacy: | 100,9 lm/w | R9 : | 59 |
| UGR: | <19 | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 66.000 L90 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 8,4W | | |

Light output tolerance +/- 10%

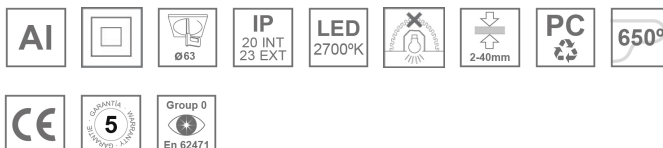

CUSTOM MADE OPTIONS:



KOMBIC 70 DOWNLIGHT

K711523RF927DWW

KOMBIC 70 1500 IP23 9VWW RF FL DA WH/WH

PHOTOMETRIC DATA :

