

KOMBIC 70 DOWNLIGHT


K711523WW927DWW



KOMBIC 70 1500 IP43 9VWW WW DA WH/WH

Description:

LAMP Round recessed downlight KOMBIC 70 1500 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K and CRI90. Electronic DALI gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: 72.000 L80 B10. Available finishes: White and black.



Finish: Matte white RAL 9010


Weight: 210 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	695 lm	°K :	2700
Plum:	10W	CRI :	90
Efficacy:	69,5 lm/w	R9 :	68
Type:	COB	MacAdam:	3
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	8,4W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

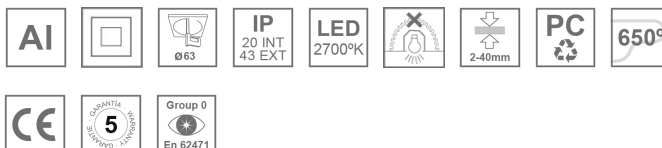

CUSTOM MADE OPTIONS:



KOMBIC 70 DOWNLIGHT

K711523WW927DWW

KOMBIC 70 1500 IP43 9VWW WW DA WH/WH

PHOTOMETRIC DATA :

K711523WW927DWW
 $\eta = 100\%$
 $I_{max} = 1245 \text{ cd/klm}$
 UTE: 1,00B
 CIE: 74 93 99 100 100

