

KOMBIC 70 DOWNLIGHT

TECHNICAL DATA ON REVIEW


K711544OP927DWW



KOMBIC 70 1500 IP44 9VWW OPAL DA WH/WH


Description:

KOMBIC 70 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white and opal optical sheet. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring Dali included. Insulation class II. LED life time: 66000 L90 B10. With IP44 degree of protection. Group 0 photobiological safety.



Finish: Matte white RAL 9010

Weight: 190 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	763 lm	°K :	2700
Plum:	9,5W	CRI :	90
Efficacy:	80,3 lm/w	R9 :	61
Type:	COB	MacAdam:	3
LED Lifetime:	66.000 L90 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	8,4W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

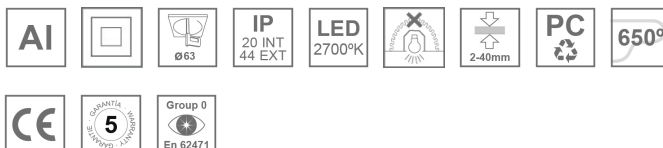

CUSTOM MADE OPTIONS:



KOMBIC 70 DOWNLIGHT

TECHNICAL DATA ON REVIEW

K711544OP927DWW

KOMBIC 70 1500 IP44 9VWW OPAL DA WH/WH

PHOTOMETRIC DATA :

K711544OP927DWW
 $\eta = 100\%$
 $I_{max} = 942 \text{ cd/klm}$
 UTE: 1,00B
 CIE: 75 94 99 100 100

