

## KOMBIC 70 DOWNLIGHT

K71RO1540WF827DWW



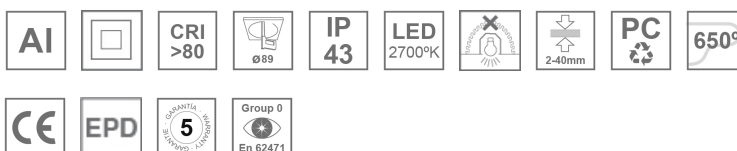
## KOMBIC 70 RO 1500 IP43 WFL 827 DA WH/WH

**Description:**

Adjustable recessed downlight model KOMBIC 70 RO 1500 from the LAMP brand. Aluminum injection frame and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability degree V0 according to UL94. Interior reflector finished in white. Adjustable luminaire +/-25° with wide flood optics for greater efficiency and control of light distribution and glare reduction UGR<19. Aluminum injection heat sink with cataphoresis treatment for greater thermal stability. COB LED, with 2700K color temperature with CRI80. DALI electronic equipment included. With an IP43 degree of protection. Insulation class II. Photobiological safety group 0. Hours of life: >100.000 L90 B10 (Ta=25°C). Finished in black and white.

**Finish:** Matte white RAL 9010**Weight:** 500 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.156 lm	<b>°K :</b>	2700
<b>Plum:</b>	10W	<b>CRI :</b>	80
<b>Efficacy:</b>	115,6 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	COB	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	>100.000 L90 B10 (Ta=25°C)		
<b>Power:</b>	8,4W		

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 70 DOWNLIGHT

K71RO1540WF827DWW

KOMBIC 70 RO 1500 IP43 WFL 827 DA WH/WH

PHOTOMETRIC DATA :

