


KOMBIC 70 SURFACE

K71SF1520RW927DBB



KOMBIC 70 SF 1500 IP23 9VWW RF WFL D B/B

Description:

LAMP Suspended or ceiling mounting downlight KOMBIC 70 SF 1500. Body made of recycled aluminium extrusion at a rate of 75% and reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in black and Wide Flood reflector for greater efficiency and to achieve controlled light distribution and low glare level, less than UGR<19. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K and IRC90. Electronic DALI gear included. IP23 rated. Insulation Class I. Photobiological safety group 0. LED life time: 72.000 L80 B10. Available finishes: White and black.

Finish: Matte black RAL 9011

Weight: 570 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	730 lm	°K :	2700
Plum:	10,8W	CRI :	90
Efficacy:	67,6 lm/w	R9 :	61
UGR:	16	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	8,4W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:










KOMBIC 70 SURFACE

K71SF1520RW927DBB

KOMBIC 70 SF 1500 IP23 9VWW RF WFL D B/B

PHOTOMETRIC DATA :

K71SF1520RW927DBB
 $\eta = 100\%$
 $I_{max} = 1630 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

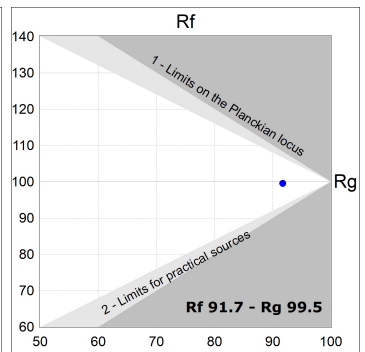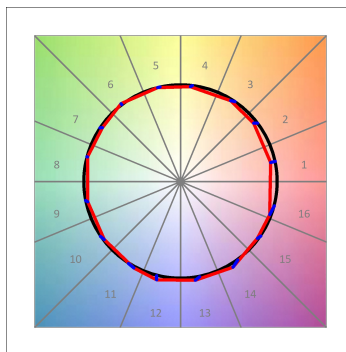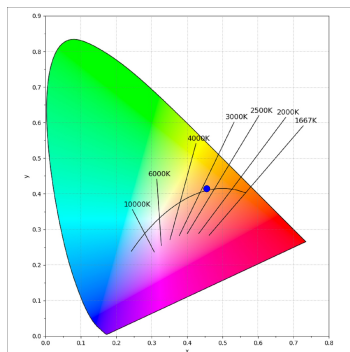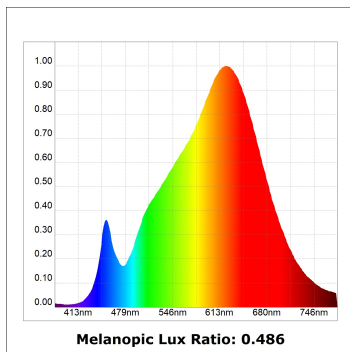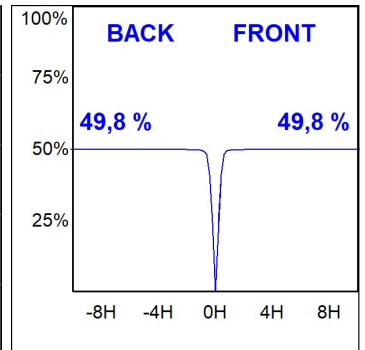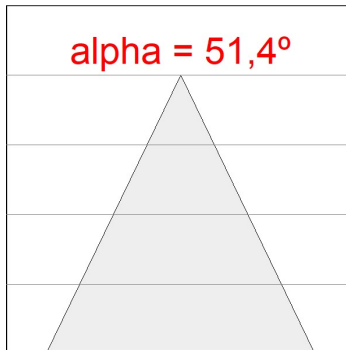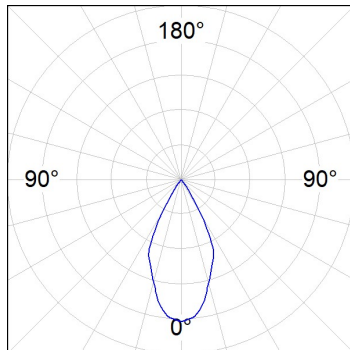

ACCESSORIES :

Suspension



Product code:
K71SUADLATBK

Description:
KOMBIC 70 SF ADAPT. LATERAL CABLE BK



Product code:
K71SUADLATWH

Description:
KOMBIC 70 SF ADAPT. LATERAL CABLE WH



Product code:
K71SUCAWI2000DBK
K71SUCAWI2000NBK

Description:
KOMBIC 70 SF ACC. ELEC 5P SUSP 2M BK
KOMBIC 70 SF ACC. ELEC 3P SUSP 2M BK



Product code:
K71SUCAWI2000DWH
K71SUCAWI2000NWH

Description:
KOMBIC 70 SF ACC. ELEC 5P SUSP 2M WH
KOMBIC 70 SF ACC. ELEC 3P SUSP 2M WH