

K71SF1540OP927NWW




KOMBIC 70 SF 1500 IP43 9VWW OP W/W

Description:

LAMP Suspended or ceiling mounting downlight KOMBIC 70 SF 1500. Body made of recycled aluminium extrusion at a rate of 75% and reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white and opal optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K and IRC90. Electronic ON OFF gear included. IP43 rated. Insulation Class I. Photobiological safety group 0. LED life time: 72.000 L80 B10. White finish.

Finish: Matte white RAL 9010

Weight: 510 g



Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	763 lm	°K :	2700
Plum:	9,5W	CRI :	90
Efficacy:	80,3 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	8,4W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:










KOMBIC 70 SURFACE

K71SF1540OP927NWW

KOMBIC 70 SF 1500 IP43 9VWW OP W/W

PHOTOMETRIC DATA :

K71SF1540OP927NWW
 $\eta = 100\%$
 $I_{max} = 942 \text{ cd/klm}$
 UTE: 1,00B
 CIE: 75 94 99 100 100

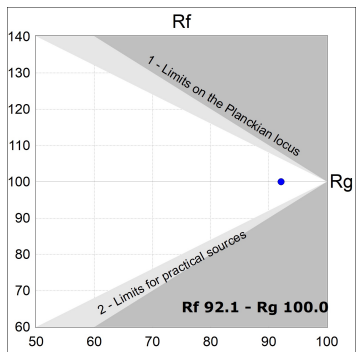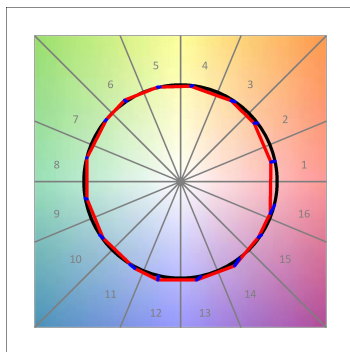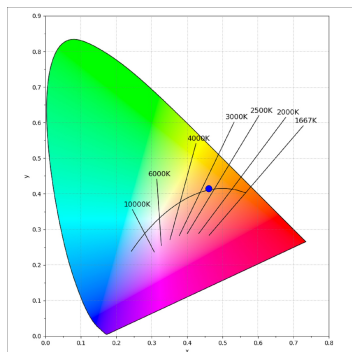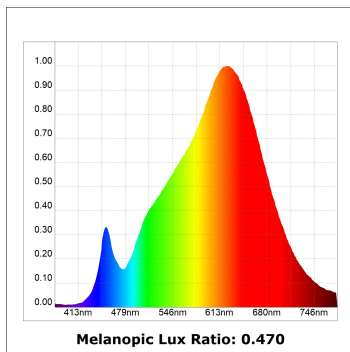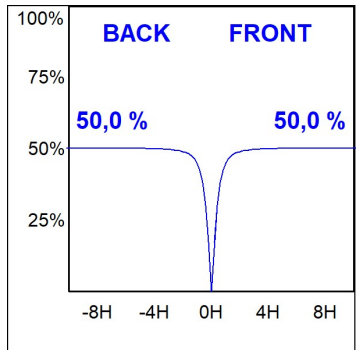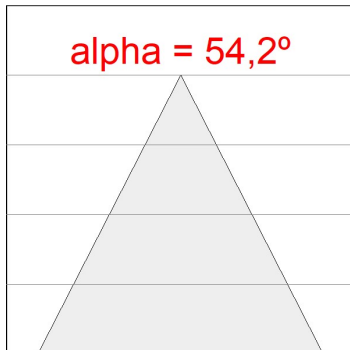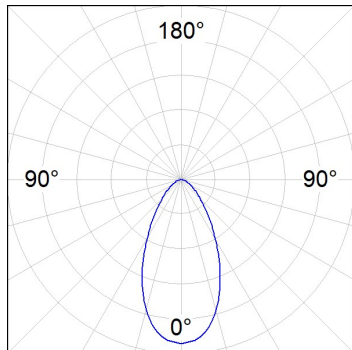

ACCESORIES :

Suspension



Product code:
K71SUADLATBK

Description:
KOMBIC 70 SF ADAPT. LATERAL CABLE BK



Product code:
K71SUADLATWH

Description:
KOMBIC 70 SF ADAPT. LATERAL CABLE WH



Product code:
K71SUCAWI2000DBK
K71SUCAWI2000NBK

Description:
KOMBIC 70 SF ACC. ELEC 5P SUSP 2M BK
KOMBIC 70 SF ACC. ELEC 3P SUSP 2M BK



Product code:
K71SUCAWI2000DWH
K71SUCAWI2000NWH

Description:
KOMBIC 70 SF ACC. ELEC 5P SUSP 2M WH
KOMBIC 70 SF ACC. ELEC 3P SUSP 2M WH