


# KOMBIC 70 SURFACE

K71SF1540OP930DWW



## KOMBIC 70 SF 1500 IP43 9WW OP D W/W

### Description:

LAMP Suspended or ceiling mounting downlight KOMBIC 70 SF 1500. Body made of recycled aluminium extrusion at a rate of 75% and reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in white and opal optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K and IRC90. Electronic DALI gear included. IP43 rated. Insulation Class I. Photobiological safety group 0. LED life time: 72.000 L80 B10. White finish.

**Finish:** Matte white RAL 9010

**Weight:** 570 g

**Installation:** Surface

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	796 lm	<b>°K :</b>	3000
<b>Plum:</b>	10,8W	<b>CRI :</b>	90
<b>Efficacy:</b>	73,7 lm/w	<b>R9 :</b>	54
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	8,4W	<b>Gear:</b>	Adjustable DALI

*Light output tolerance +/- 10%*



### CUSTOM MADE OPTIONS:










K71SF1540OP930DWW

KOMBIC 70 SF 1500 IP43 9WW OP D W/W

**PHOTOMETRIC DATA :**

K71SF1540OP930DWW  
 $\eta = 100\%$   
 $I_{max} = 942 \text{ cd/klm}$   
 UTE: 1,00B  
 CIE: 75 94 99 100 100

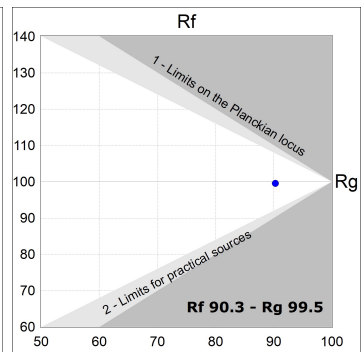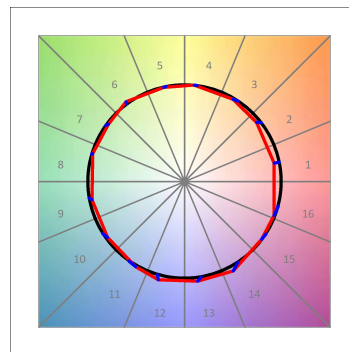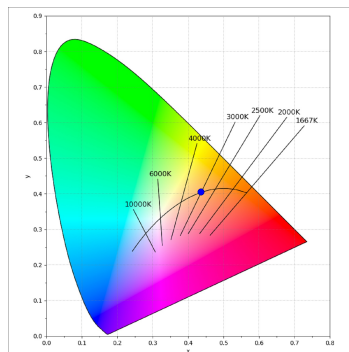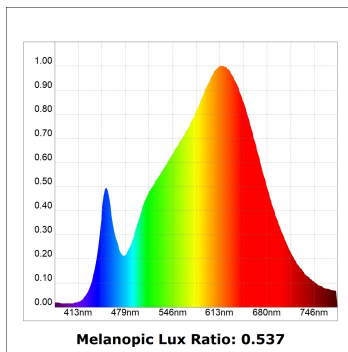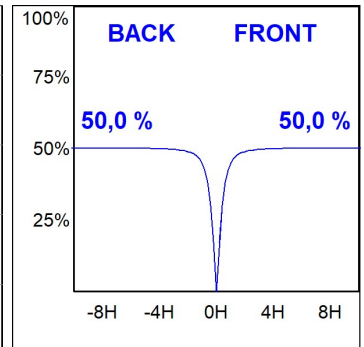

**ACCESSORIES :**

**Suspension**



**Product code:**  
K71SUADLATBK

**Description:**  
KOMBIC 70 SF ADAPT. LATERAL CABLE BK



**Product code:**  
K71SUADLATWH

**Description:**  
KOMBIC 70 SF ADAPT. LATERAL CABLE WH



**Product code:**  
K71SUCAWI2000DBK  
K71SUCAWI2000NBK

**Description:**  
KOMBIC 70 SF ACC. ELEC 5P SUSP 2M BK  
KOMBIC 70 SF ACC. ELEC 3P SUSP 2M BK



**Product code:**  
K71SUCAWI2000DWH  
K71SUCAWI2000NWH

**Description:**  
KOMBIC 70 SF ACC. ELEC 5P SUSP 2M WH  
KOMBIC 70 SF ACC. ELEC 3P SUSP 2M WH