


# KOMBIC 70 TRACK

K71TS1520RF940DBB



## KOMBIC 70 TS 1500 IP20 9NW RF FL D B/B

### Description:

Downlight to attach to three-phase track model KOMBIC 70 TS 1500 from the LAMP brand. Body made of recycled aluminum extrusion with a rate of 75% and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in black color. Flood reflector for greater efficiency and control of light distribution and lower glare UGR<16. Heatsink made of aluminum injection. COB LED, with 4000K color temperature with CRI90. DALI electronic equipment included. With an IP20 protection degree. Insulation class II. Photobiological safety group 0. LED life time: 72,000 L80 B10. Finished in black and white.

**Finish:** Matte black RAL 9011


**Weight:** 600 g

**Installation:** 3-Circuit track

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	934 lm	<b>°K :</b>	4000
<b>Plum:</b>	10,5W	<b>CRI :</b>	90
<b>Efficacy:</b>	90,7 lm/w	<b>R9 :</b>	71
<b>UGR:</b>	16	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	8,4W		

*Light output tolerance +/- 10%*

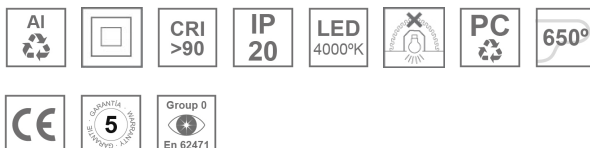

### CUSTOM MADE OPTIONS:



K71TS1520RF940DBB

KOMBIC 70 TS 1500 IP20 9NW RF FL D B/B

**PHOTOMETRIC DATA :**

K71TS1520RF940DBB  
 $\eta = 100\%$   
 $I_{max} = 2619 \text{ cd/klm}$   
 UTE:  
 CIE: 101 100 100 100 100

