

## LAMP TUB 60 SUSPENDED TRACK

L61ST168MOIP9TWDW

- LTUB60 SUT 1680 7100 TW D/I COMF DALI WH

**Description:**

Lamptub 60 model from LAMP to be installed on a suspended rail. Made of recycled aluminium extrusion with circular section of 60mm and length of 1680mm. Direct-indirect light model with an opal comfort diffuser made of a translucent polycarbonate diffuser and an optical film to achieve a controlled light distribution and low UGR<19. Model for MID-POWER LED, with TW colour temperature with CRI90. Built-in electronic DALI control gear. With IP20, IK07 degree of protection. Insulation class II. Group 0 photobiological safety. Lifetime: 72.000h L80 B10. Compatible with Lamp Nomadic system. Available finishes: White (RAL 9010), Black (RAL 9011), Wellbeing and BeSocial palette.


**Finish:** Matte white RAL 9010**Dimensions:** 1.687 x 67 x 80 mm**Weight:** 4.160 g**Installation:** Suspended**TECHNICAL SPECIFICATIONS:****Light output:** 4.465 lm**Plum:** 51,5W**Efficacy:** 86,7 lm/w**UGR:** <19**Type:** MID POWER LED**LED Lifetime:** 50.000 L80 B10 (Ta=25°C)**Power:** 52.4W**°K :** TW**CRI :** 90**MacAdam:** 3**Power Supply:** 220-240V 50/60Hz**Gear:** Adjustable DALI DT8**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

LAMPTUB 60 SUSPENDED TRACK

L61ST168MOIP9TWDW

LTUB60 SUT 1680 7100 TW D/I COMF DALI WH

PHOTOMETRIC DATA :

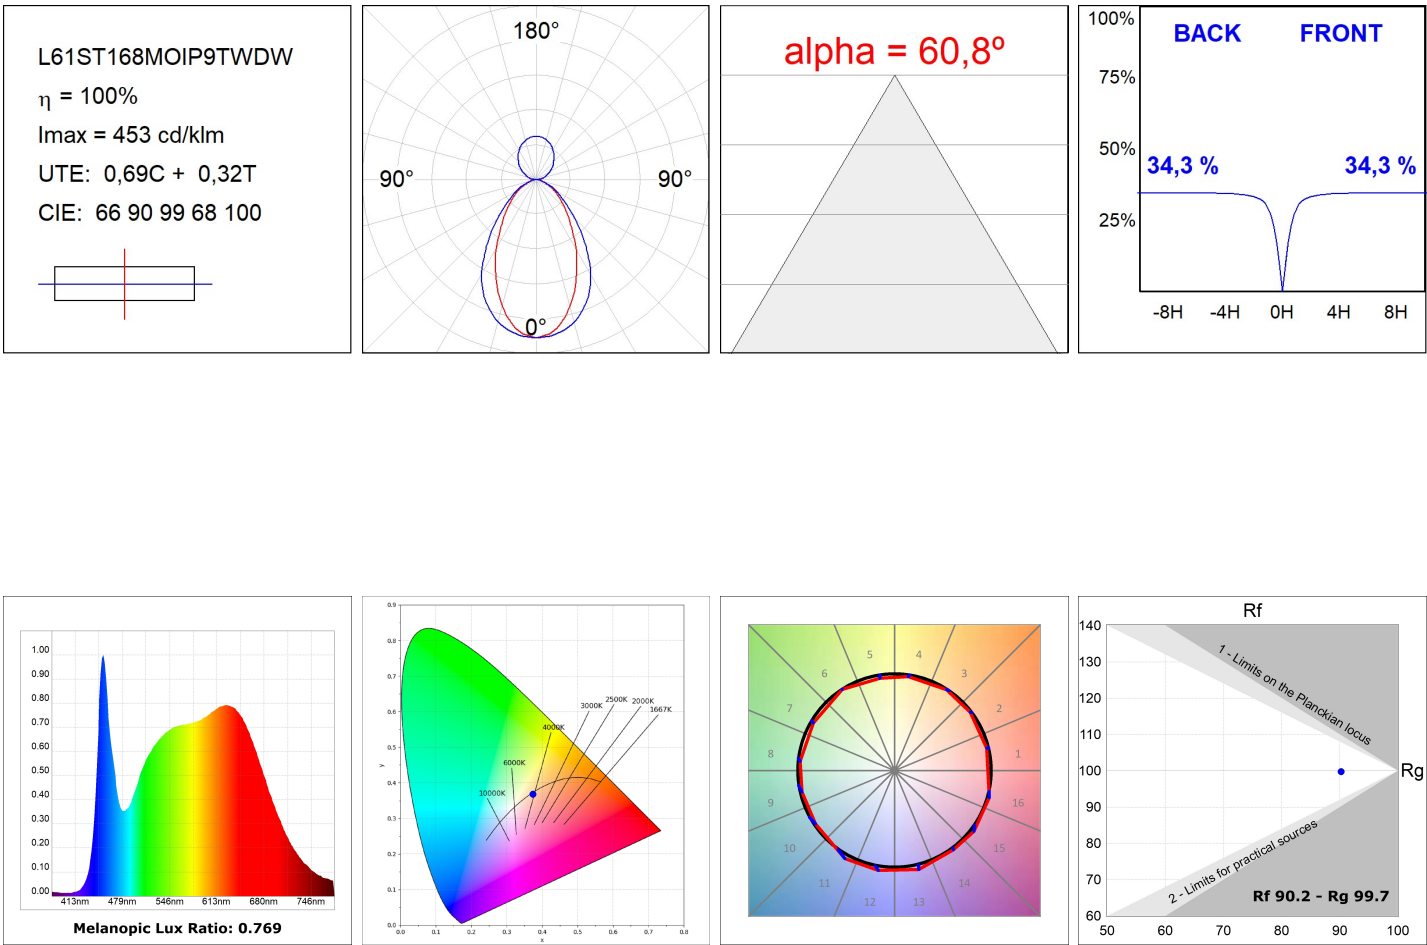

ACCESORIES :

Assembly



**Product code:**  
L6SUECB

**Description:**  
LTUB60 ACC. SUR END COVER BK.



**Product code:**  
L6SUECW

**Description:**  
LTUB60 ACC. SUR END COVER WH.



**Product code:**  
L6SUECW3

**Description:**  
LTUB60 ACC. SUR END COVER WE.



**Product code:**  
L6SUECW4

**Description:**  
LTUB60 ACC. SUR END COVER BS.