

MCE1121240PR840DW



MOD CUSTOM EFF 120x12 4200 NW PR DA WH

Description:

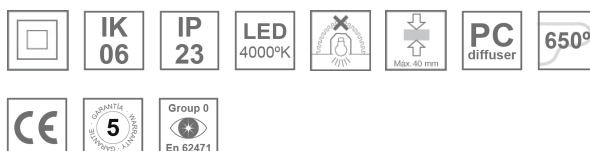
LAMP MODULAR CUSTOM EFFICIENCY recessed 1200x120 format. Custom option: adaptable to any installation, technical ceiling, finish or technical aspects by the needs of the project. Made of steel, prismatic diffuser of translucent polycarbonate and an optical film to control light distribution and reduce glare UGR <19. Model for MID-POWER LED, 4000K colour temperature and IRC 80. Control DALI gear included. With a protection rating of IP23. Insulation class II. Photobiological safety group 0. Lifetime: 50.000 L80 B10.

Finish: Matte white RAL 9010

Dimensions: 1.200 x 120 x 59,3 mm

Installation: Surface
TECHNICAL SPECIFICATIONS:

Light output:	3.372 lm	°K :	4000
Plum:	25W	CRI :	80
Efficacy:	134,9 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER	Gear:	Adjustable DALI
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	22W		

Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

MCE1121240PR840DW

MOD CUSTOM EFF 120x12 4200 NW PR DA WH

PHOTOMETRIC DATA :

