



MCE1123050PR840NW

**MOD CUSTOM EFF 120X30 5000 NW PR WH****Description:**

LAMP MODULAR CUSTOM EFFICIENCY recessed 1200X300 format. Custom option: adaptable to any installation, technical ceiling, finish or technical aspects by the needs of the project. Made of steel, prismatic diffuser of translucent polycarbonate and an optical film to control light distribution and reduce glare UGR <19. Model for MID-POWER LED, 4000K colour temperature and IRC 80. Control gear included. With a protection rating of IP23. Insulation class II. Photobiological safety group 0. Lifetime: 50.000 L80 B10.

**Finish:** Matte white RAL 9010**Dimensions:** 1.200 x 300 x 59,3 mm**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	4.172 lm	<b>°K :</b>	4000
<b>Plum:</b>	31W	<b>CRI :</b>	80
<b>Efficacy:</b>	134,6 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	MID POWER	<b>Gear:</b>	Electronic
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)		
<b>Power:</b>	28W		

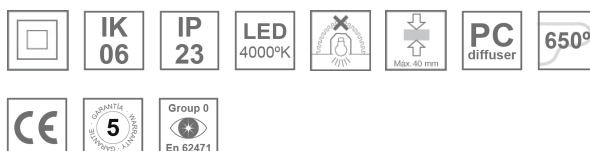**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

MCE1123050PR840NW      MOD CUSTOM EFF 120X30 5000 NW PR WH

**PHOTOMETRIC DATA :**

