

ML2SF35LOPR930DB




MUN LIGHT G2 SF Ø350 LO PRISM 9WW DA BK

Description:

LAMP suspended or surface mounted luminaire MUN LIGHT G2 SF Ø350 LO PRISM. Manufactured from recycled aluminium extrusion with a 95% recycling rate, with a PRISMATIC polycarbonate diffuser to control light distribution and reduce glare UGR <19. Model for LED MID-POWER, colour temperature 3000K and CRI90. Electronic DALI gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Available finishes: White and black.

Finish: Texturised matte graphite RAL 7021

Weight: 1.600 g



Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.254 lm	°K :	3000
Plum:	11,5W	CRI :	90
Efficacy:	109 lm/w	R9 :	51
UGR:	<19	MacAdam:	3
Type:	MID POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI2
Power:	9,5W		

Light output tolerance +/- 10%

**CUSTOM MADE OPTIONS:**








MUN LIGHT

ML2SF35LOPR930DB

MUN LIGHT G2 SF Ø350 LO PRISM 9WW DA BK

PHOTOMETRIC DATA :

ML2SF35LOPR930DB
 $\eta = 100\%$
 $I_{max} = 504 \text{ cd/klm}$
 UTE: 1,00C
 CIE: 65 92 99 100 100

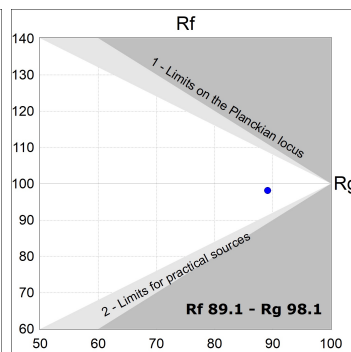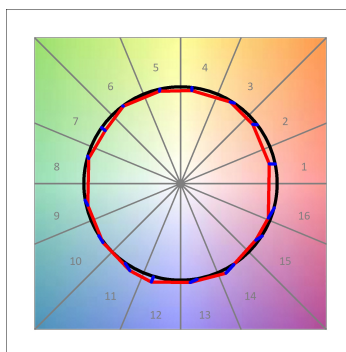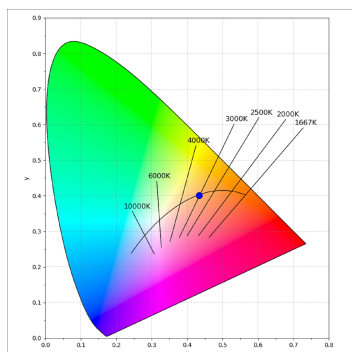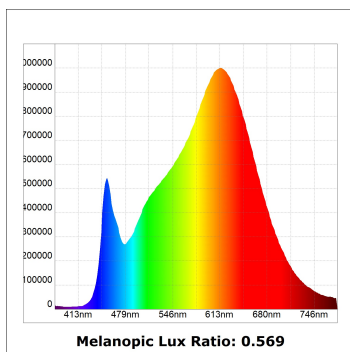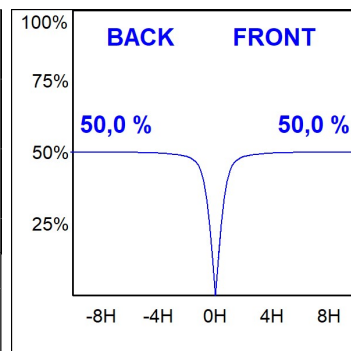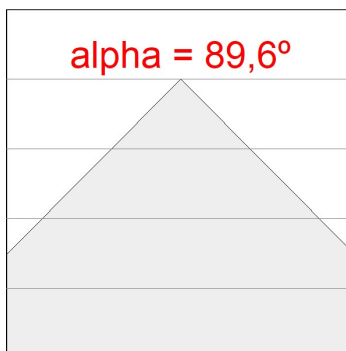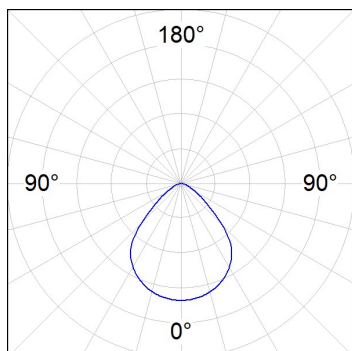

ACCESORIES :

Suspension



Product code:

ML2SUEMSF1500DB

ML2SUEMSF3000DB

Description:

MUN LIGHT G2 ACC SUSP ELMEC 1500MM D B

MUN LIGHT G2 ACC SUSP ELMEC 3000MM D B