


MUN LIGHT

ML2SF35MOPR930NW



MUN LIGHT G2 SF Ø350 MO PRISM 9WW NR WH

Description:

LAMP suspended or surface mounted luminaire MUN LIGHT G2 SF Ø350 MO PRISM. Manufactured from recycled aluminium extrusion with a 95% recycling rate, with a PRISMATIC polycarbonate diffuser to control light distribution and reduce glare UGR <19. Model for LED MID-POWER, colour temperature 3000K and CRI90. Electronic ON OFF gear included. IP20, IK07 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 50.000 L80 B10. Available finishes: White and black.

Finish: Texturised matt white

Weight: 1.600 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.881 lm	°K :	3000
Plum:	16,6W	CRI :	90
Efficacy:	113,3 lm/w	R9 :	51
UGR:	<19	MacAdam:	3
Type:	MID POWER	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	16,6W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:










MUN LIGHT

ML2SF35MOPR930NW

MUN LIGHT G2 SF Ø350 MO PRISM 9WW NR WH

PHOTOMETRIC DATA :

ML2SF35MOPR930NW
 $\eta = 100\%$
 $I_{max} = 504 \text{ cd/klm}$
 UTE: 1,00C
 CIE: 65 92 99 100 100

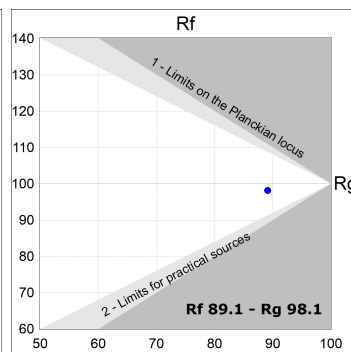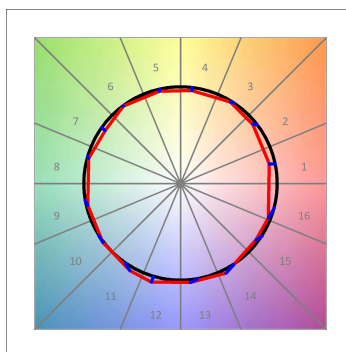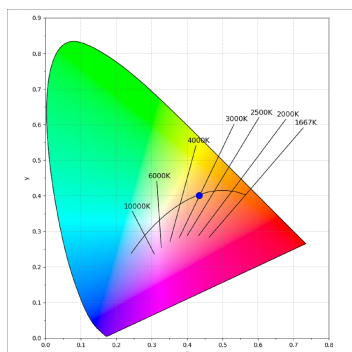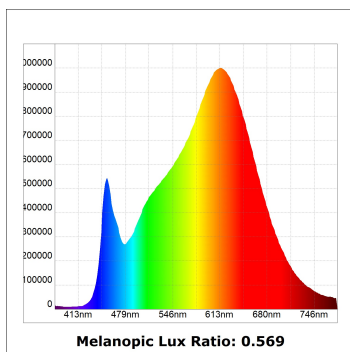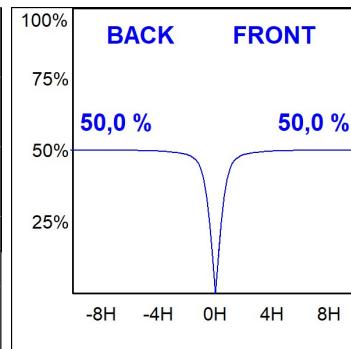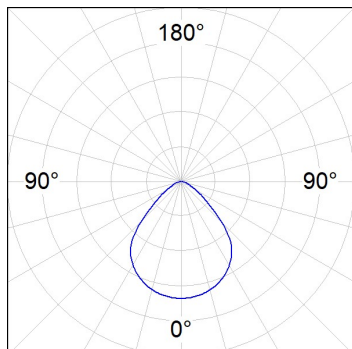

ACCESORIES :

Suspension



Product code:

ML2SUEMSF1500NW

ML2SUEMSF3000NW

Description:

MUN LIGHT G2 ACC SUSP ELMEC 1500MM N W

MUN LIGHT G2 ACC SUSP ELMEC 3000MM N W